

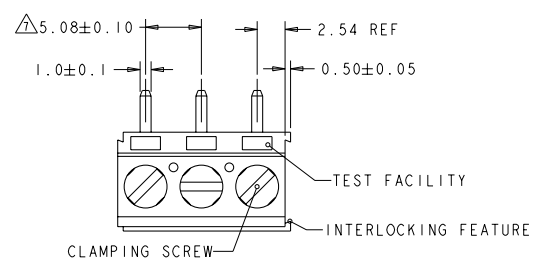



LOC	DISP	REVISIONS				
FT	0	REV	DESCRIPTION	DATE	BY	CHK
		B1	REVISED PER ECO-11-004835	11MAR2011	AK	HMA

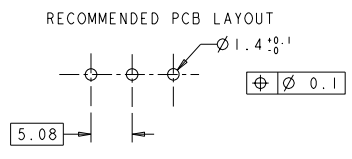

- △ MATERIALS AND FINISH  
HOUSING: PA 6-6, UL 94-V0, COLOR BLACK.  
CLAMP: BRASS, NICKEL PLATED.  
TERMINAL: BRASS, TIN PLATED.  
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
- 2 SUITABLE FOR 1,6-2,4mm PC BOARD THICKNESS.
- 3 END-TO-END STACKABLE W/INTERLOCK WITHOUT LOSS OF CENTERLINE SPACING.
- 4 WIRE SIZE RANGE  
SOLID WIRE: 0,03-2,5mm<sup>2</sup> (13AWG).  
STRANDED WIRE: 0,03-1,5mm<sup>2</sup> (15AWG).
- 5 RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC. FILE N° E60677.
- 6 IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.
- △ NOT CUMULATIVE TOLERANCE.

127.00	25	2-1546073-5
121.92	24	2-1546073-4
116.84	23	2-1546073-3
111.76	22	2-1546073-2
106.68	21	2-1546073-1
101.60	20	2-1546073-0
96.52	19	1-1546073-9
91.44	18	1-1546073-8
86.36	17	1-1546073-7
81.28	16	1-1546073-6
76.20	15	1-1546073-5
71.12	14	1-1546073-4
66.04	13	1-1546073-3
60.96	12	1-1546073-2
55.88	11	1-1546073-1
50.80	10	1-1546073-0
45.72	9	1546073-9
40.64	8	1546073-8
35.56	7	1546073-7
30.48	6	1546073-6
25.40	5	1546073-5
20.32	4	1546073-4
15.24	3	1546073-3
10.16	2	1546073-2
DIM A	No OF POS.	PART NUMBER

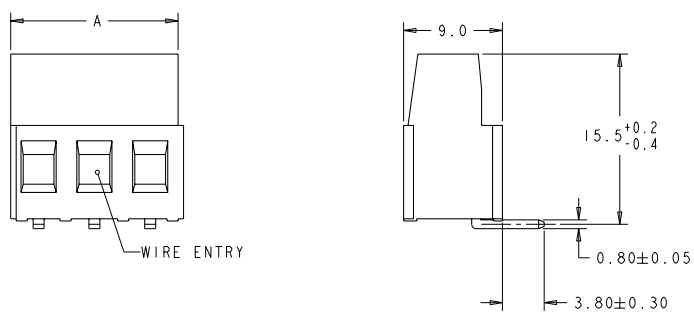

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: ZANOLIN, 18AUG2001. CD: BIEVENOUR, 18AUG2001. APPR: BIEVENOUR, 18AUG2001.

**TE** TE Connectivity

PRODUCT SPEC: 108-20166  
APPLICATION SPEC: 114-20079

TERMINAL BLOCK PCB MOUNT  
TOP ENTRY WIRE, STACKING  
W/INTERLOCK, 5.08mm PITCH

SCALE: 4:1 SHEET 1 OF 1