

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LR	DESCRIPTION	DATE	MIN	APD
		A		REVISED PER ECO-05-10413	9/30/05	SS	SRY

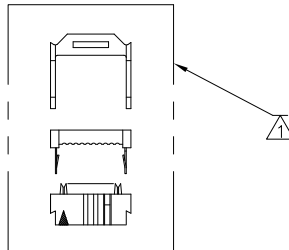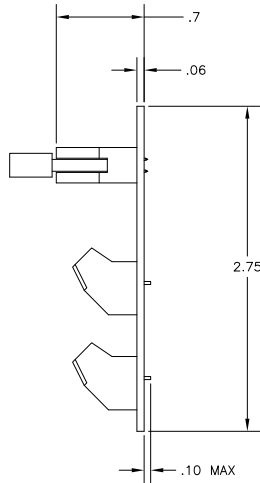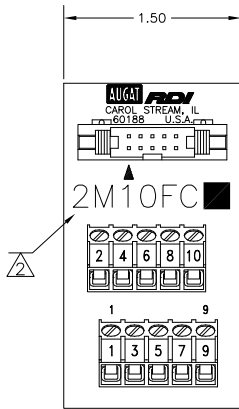

**HEADER:**  
**MATERIALS:**  
 HEADER: COPPER ALLOY, GOLD PLATED, 94V-0 THERMOPLASTIC.  
 CONNECTOR: COPPER ALLOY, GOLD PLATED, 94V-0 THERMOPLASTIC.

**ELECTRICAL:**  
 RATING: 1 AMPERE MAX. (CONNECTOR).

**MECHANICAL:**  
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.

**TERMINAL BLOCK:**  
**MATERIALS:**  
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.  
 TERMINALS: COPPER ALLOY, TIN PLATED.  
 SCREWS: 3M, BRASS, NICKEL PLATED

**ELECTRICAL:**  
 RATING: 10A, 300V(UL).

**MECHANICAL:**  
 WIRE RANGE: 14-22 AWG.

**MOUNTING:**  
**MATERIALS:**  
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK, (SOLD SEPARATELY).

- ⚠ ALL CONNECTOR/STRAIN RELIEF COMPONENTS TO BE SHIPPER LOOSE AND UNASSEMBLED.
- ⚠ CATALOG NUMBER MARKED HERE.
- ⚠ CONTAINS NO TIN-LEAD PLATING.

⚠ 2M10FCL	1776615-1
2M10FC	1437684-5
CATALOG NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	M.S. FEHER	31MAR2004	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		CHK	S. YODER	31MAR2004	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES	0 PLC ± .01	1 PLC ± .01		2M10FC ASSEMBLY	
	1 PLC ± .01	2 PLC ± .01		APPLICATION SPEC	
	2 PLC ± .01	3 PLC ± .01		WEIGHT	
	3 PLC ± .01	4 PLC ± .01		SIZE CASE CODE DRAWING NO	
	4 PLC ± .01	ANGLE		A2 00779 C-1437684-5	
	FINISH	RESTRICTED TO		CUSTOMER DRAWING	
				SCALE	NTS
				SHEET	1 of 1
				REV	A

AMP 1471-9 REV 31MAR2000

1437684-5

A