

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
E		REVISED PER ECO-06-024578	2/13/07	SS	SRY

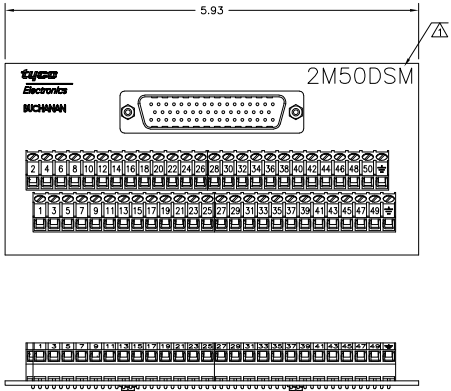

D-SUB CONNECTOR:
MATERIAL:
 HOUSING: THERMOPLASTIC POLYESTER, 94V-0.
 CONTACTS: COPPER ALLOY, GOLD PLATED.
MECHANICAL:
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.
TERMINAL BLOCK:
MATERIAL:
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0.
 TERMINALS: COPPER ALLOY, TIN PLATED.
 SCREWS: 3M, BRASS, NICKEL PLATED.
ELECTRICAL CSA/UL:
 RATING: 10A, 300V.
MECHANICAL:
 WIRE RANGE: 14-22 AWG.
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK,
 (SOLD SEPARATELY).
NOTES:
 ⚠ CATALOG NUMBER MARKED HERE.
 ⚠ CONTAINS NO TIN-LEAD PLATING.
 ⚠ CONTAINS TIN-LEAD AT SOLDERED LOCATIONS ONLY.

⚠	2M50DSMR	1776613-1
⚠	2M50DSML	1546696-1
	2M50DSM	2-1437684-9
	CATALOG NO.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: S. SCHLEGEL 26JUN02	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		OK: H. WAKEEM 6/26/02	NAME: H. WAKEEM 6/26/02	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC: -	SIZE: A2	CHG CODE: C=2-1437684-9
MATERIAL: -		FINISH: -	WEIGHT: -	RESTRICTED TO: -
		CUSTOMER DRAWING	SCALE: NTS	SHEET: 1 of 1 REV: E