

CM 50-LG/H 30/BO BK

Order No.: 2942878


The illustration shows versions CM 50-LG/H 30/BO and CM 75-LG/H 35 BO



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2942878>

Electronic module, for PCB insertion, with a 30 mm tall covering hood

Commercial data

GTIN (EAN)	
sales group	F030
Pack	5 pcs.
Customs tariff	85369010
Catalog page information	Page 634 (CC-2011)

Product notes

WEEE/RoHS-compliant since:
08/06/2004



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing type	Complete housing
Housing material	Polycarbonate fiber reinforced
Color	black


Dimensions / positions

Length	102 mm
--------	--------


Width	50 mm
Technical data	
Ambient temperature (operation)	-40 °C ... 125 °C
Inflammability class acc. to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	26.8 W 39 W

Diagrams/Drawings

Dimensioned drawing

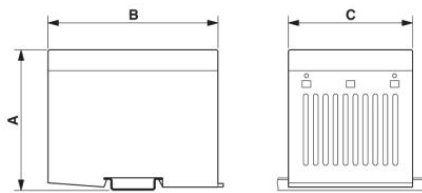


Dimension A=133 mm; dimension B=102 mm; dimension C=50 mm

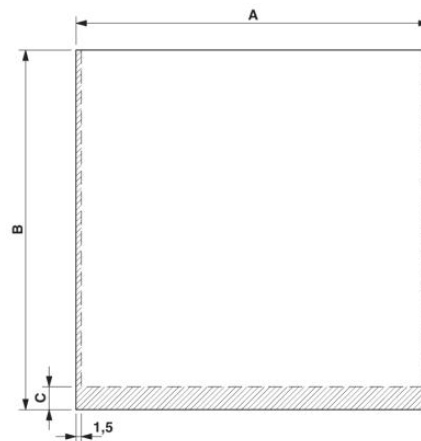

PCB 1, 7: Dimension A: 47.5 mm; B: 120.0 mm; C: 6.5 mm
 PCB 8, 13: Dimension A: 100.0 mm; B: 120.0 mm; C: 6.5 mm
 PCB 10: Dimension A: 100.0 mm; B: 92.3 mm; C: 0 mm

Schematic diagram

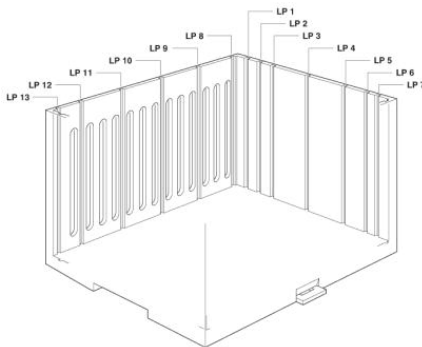

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;