

CM200-LG/H 55/BO/DB/GH BK


Order No.: 2941853



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2941853>

Electronic module, for PCB insertion, with a 55 mm tall covering hood

Commercial data

GTIN (EAN)	 4 017918 107703
Note	Made-to-order
sales group	F030
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 635 (CC-2011)

Product notes

WEEE/RoHS-compliant since:
08/06/2004



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing type	Complete housing
Housing material	Polycarbonate fiber reinforced
Color	black

Dimensions / positions


Length	149 mm
Width	200 mm

Technical data



Ambient temperature (operation)	-40 °C ... 125 °C
Inflammability class acc. to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	160 W 200 W

Diagrams/Drawings


Dimensioned drawing

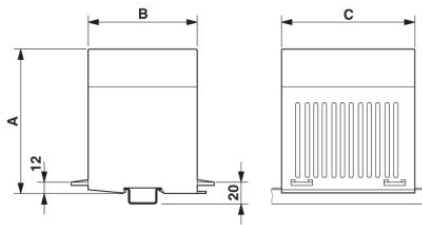

Dimension A=165 mm; dimension B=149 mm; dimension C=200 mm

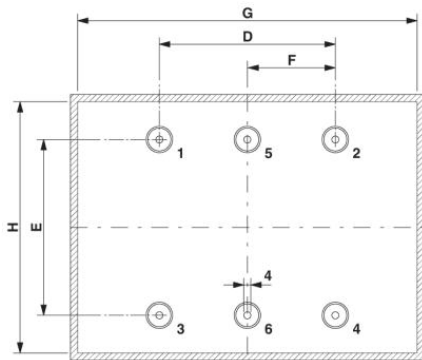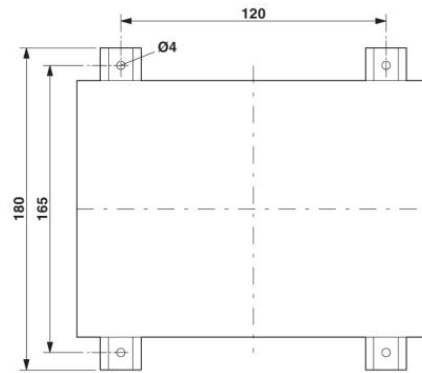


Dimension D: 100.0 mm; E: 100.0 mm; F: 50.0; G: 190.0 mm; H: 138.0 mm
 Spacer pins 1 - 6: Height 20 mm; \varnothing 4 mm

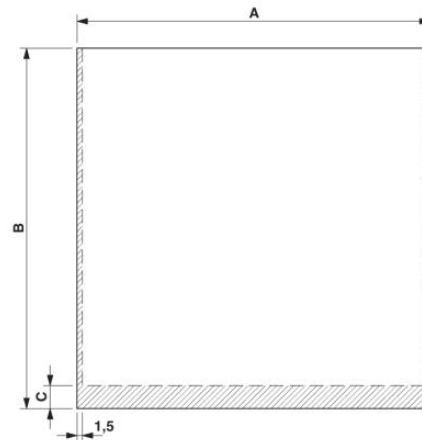

PCB 8, 13: Dimension A: 141.0 mm; B: 140.5 mm; C: 0 mm

Schematic diagram

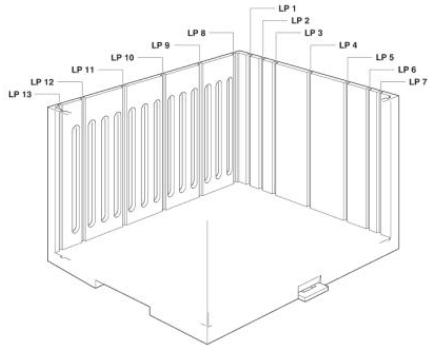

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;