

## CM 62-LG/H 35/BO BK


Order No.: 2944863

The illustration shows versions CM 62-LG/H 35/BO and CM 90-LG/H 12,5 BO



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944863>

Electronic module, for PCB insertion, with a 35 mm tall covering hood

Commercial data	
GTIN (EAN)	
Note	Made-to-order
sales group	F030
Pack	5 pcs.
Customs tariff	85369010
Catalog page information	Page 634 (CC-2011)

#### Product notes

WEEE/RoHS-compliant since:  
08/06/2004



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General</b>	
Housing type	Complete housing
Housing material	Polycarbonate fiber reinforced
Color	black

**Dimensions / positions**


Length	75 mm
Width	62 mm

**Technical data**


Ambient temperature (operation)	-40 °C ... 125 °C
Inflammability class acc. to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	20.8 W 24.4 W

**Diagrams/Drawings**

Dimensioned drawing

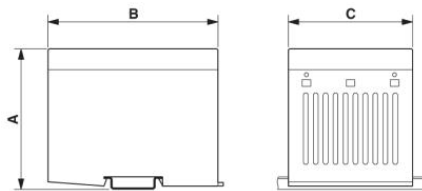


Dimension A=108 mm; dimension B=75 mm; dimension C=62 mm

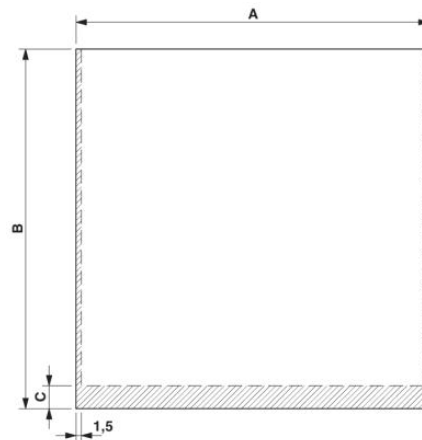

PCB 1, 7: Dimension A: 72.5 mm; B: 96.0 mm; C: 0 mm  
 PCB 8, 13: Dimension A: 60.0 mm; B: 96.0 mm; C: 0 mm

Schematic diagram

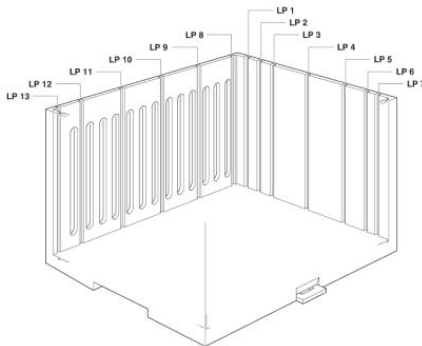

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;