


UEG 30/1-FS/FS


Order No.: 2790884

The illustration shows version UEG 30/2 FS FS

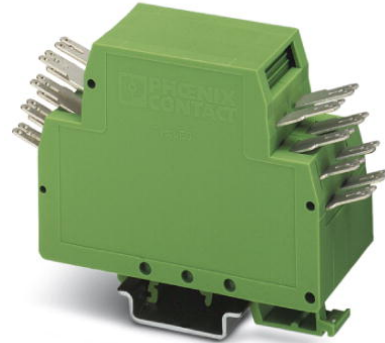


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2790884>

Electronic housing, for PCB insertion, fully equipped with 4 screw or tab connections per side

Commercial data	
GTIN (EAN)	4 017918 072377 
Note	Made-to-order
sales group	F010
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 585 (CC-2011)

Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Housing type	Complete housing
Housing material	Polyamide (PA 6.6)
Color	green

Dimensions / positions

Length	101.5 mm
Width	30 mm
Number of positions	8

Technical data

Ambient temperature (operation)	-40 °C ... 105 °C
Inflammability class acc. to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	4.8 W 8 W

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm

Certificates / Approvals




Certification GOST

Accessories


Item	Designation	Description
General		
2790428	P 1-UEG-FS/FS	PCB for custom fitting electronic components

Diagrams/Drawings


Explosion drawing

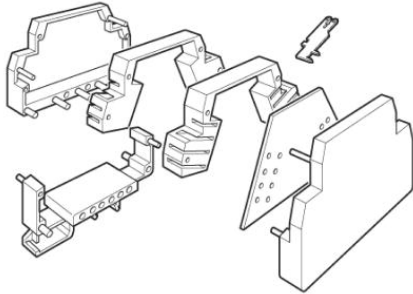

Dimensioned drawing

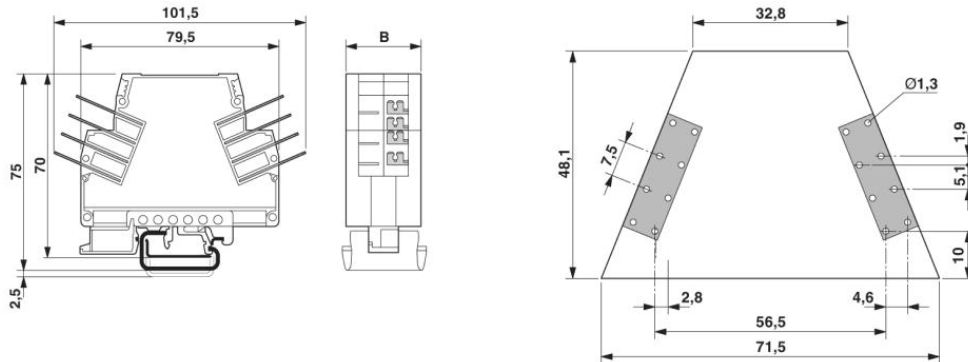

Schematic diagram

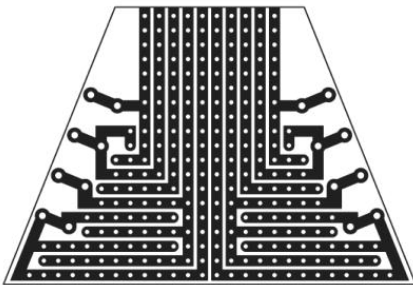

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;