


## PMH 2:SYMBOLE

Order No.: 0800527

The illustration shows a combination of upper case letters, symbols and figures in versions PMH -0, -2 and -4

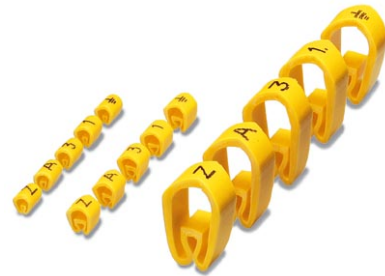

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0800527>

Conductor marking collar, printed horizontally, for diameter: 3.0 - 6.0 mm, printed: with symbols +, -, /, ~, L1, L2, L3 PE, PEN

### Commercial data

sales group	B111
Pack	100 pcs.
Customs tariff	39269097
Catalog page information	Page 471 (CL-2007)

### Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

Note	Please specify the required marking with order: Minimum order per imprint: 1 packing unit
	Please use the order key when ordering.
Color	yellow
Inflammability class acc. to UL 94	V0
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Ambient temperature (operation)	-45 °C ... 70 °C

Components	Free from silicone, halogen and cadmium
Material	EVA

### Configuration options

Symbols	Plus [+] Minus [-] Period [.] Backslash [SLASH] Colon [:] Direct current [=] Earth, general [ERDE] L1 [L1] L2 [L2] L3 [L3] PE [PE] PEN [PEN] Prot.earth [SERD] AC current [WSTR]
---------	---

### Accessories

Item	Designation	Description
<b>General</b>		
0800679	AFD-2	Threading pin, helps thread PMH onto the conductor; insert conductor into pin opening and slide collar on. For external conductor cross-section: 2.9 - 4.1 mm
0800682	AFD-3	Threading pin, helps thread PMH onto the conductor; insert conductor into pin opening and slide collar on. For external conductor cross-section: 3.8 - 5.4 mm
5020658	SORTI 4/12	Assortment box, 12 compartments external dimensions 335 x 225 x 55 mm, material: Polystyrene

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;