


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER		WIRE SIZE AWG	DIMENSIONS in.				HOUSING COLOR
PREFIX	PK		A $\pm .03$ (1,8)	B DIA. $\pm .01$ (1,3)	C $\pm .02$ (1,3)	D DIA.	
PV18-P47	-CY -MY	22-18 (1,5-1,0)	.97 (24,6)	.07 (1,8)	.49 (12,4)	.15 (3,8)	RED
PV14-P47	-C -M	16-14 (1,5-2,5)	.97 (24,6)	.07 (1,8)	.49 (12,4)	.17 (4,3)	BLUE
PV10-P55	-LY -DY	12-10 (4,0-6,0)	1.10 (27,9)	.10 (2,5)	.55 (14,0)	.25 (6,35)	YELLOW

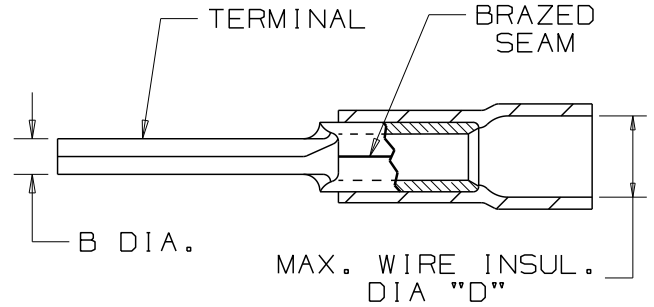


NOTES:

- RECOMMENDED FOR:
A. SOLID OR STRANDED COPPER WIRE
- MATERIAL:
A. STAMPING - COPPER, TIN PLATED
B. HOUSING - VINYL, COLOR CODED
- PACKAGE QTY: STD. PKG. -LY=50, -C, -CY=100
BULK PKG. -DY=500, -M, -MY=1000
- DIMENSIONS IN BRACKETS ARE IN mm or mm²

A. PANDUIT APPROVED: CT-100, CT-160,
CT-550CH, CT-500CH (EXCEPT PV10-P55)
CT-1550, CT-1551

6. WIRE STRIP LENGTH $5/16^{+1/32}_0$ (7,9 $^{+8}_0$)

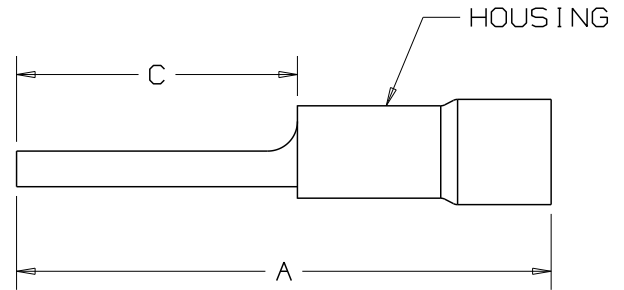

LISTED
587H
E52164

10	8/09	BCT	BCT	MODIFIED PV10-P55 PKG CODE TO -LY AND -DY			
09	7/09	BCT	BCT	ADDED UL LISTED MARKING FOR PV18-P47 AND PV14-P47			
08	6/06	DAW	DAW	ADDED UL RECOGNIZED MARKING FOR PV18-P47 AND PV14-P47	TRO0142		
07	5/05	JHNL	-	ADDED PACKAGING CODE "MY" TO DRAWING.	- - - -	- - - -	- - - -
06	5/02	DAW	SKB	MAX. WIRE INSUL. DIA "D" WAS "D" DIA. MIN.	10219	TRO	LA
05	5/01	KMD	SKB	DIM. "A" WAS 1.01 (25,8) FOR PV18-P47	09177	TRO	JAC
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	CUST

PANDUIT CORP.

TINLEY PARK, ILLINOIS

VINYL INSULATED PIN TERMINAL

DRAWN BY: DAW CHK'D: RLS SCALE: NONE DRAWING NO.: A41335