


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

Tooling Drawing NO.  
 USB A: TR00662  
 USB B: TR00664


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C1		REVISED PER ECO-11-005033	23MAR11	RK	HMR

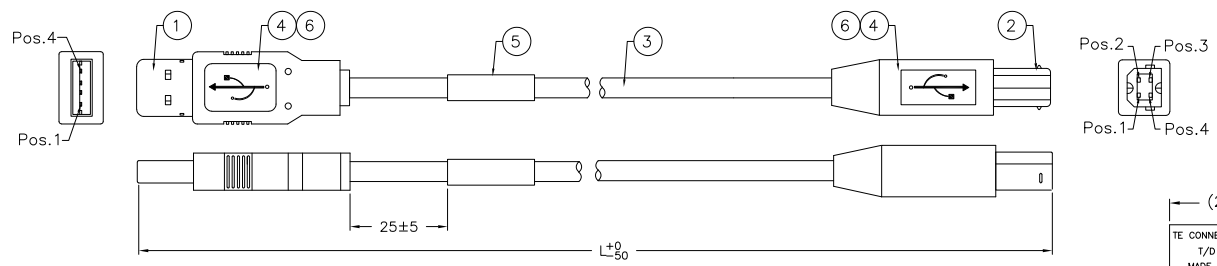

- NOTES:
1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1700MM PER USB SPECIFICATIONS.
  5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

PART NO.	1487587-1	1487587-2	1487587-3
LENGTH(L)	1000	1300	830

PIN ASSIGNMENT :

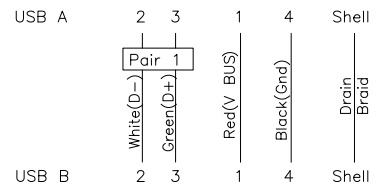

AR	AR	AR	MR	COPPER FOIL, W: 5MM, 360° SOLDER	6
1	1	1	PC	Label, 25x35mm, White 25x13mm	5
AR	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4
AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+26AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	3
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	BOVEY LIU	25FEB02	
CHK	J.HUNT	25FEB02	
APVD	J.HUNT	25FEB02	
NAME	USB A TYPE TO USB B TYPE CABLE ASSEMBLY		
PRODUCT SPEC			RESTRICTED TO
APPLICATION SPEC			
WEIGHT	A3 00779 C-1487587		
CUSTOMER DRAWING	SCALE	N.T.S.	SHEET 1 OF 1 REV C1