THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	REVISED PER ECO-11-005033	22MAR11	RK	HMR

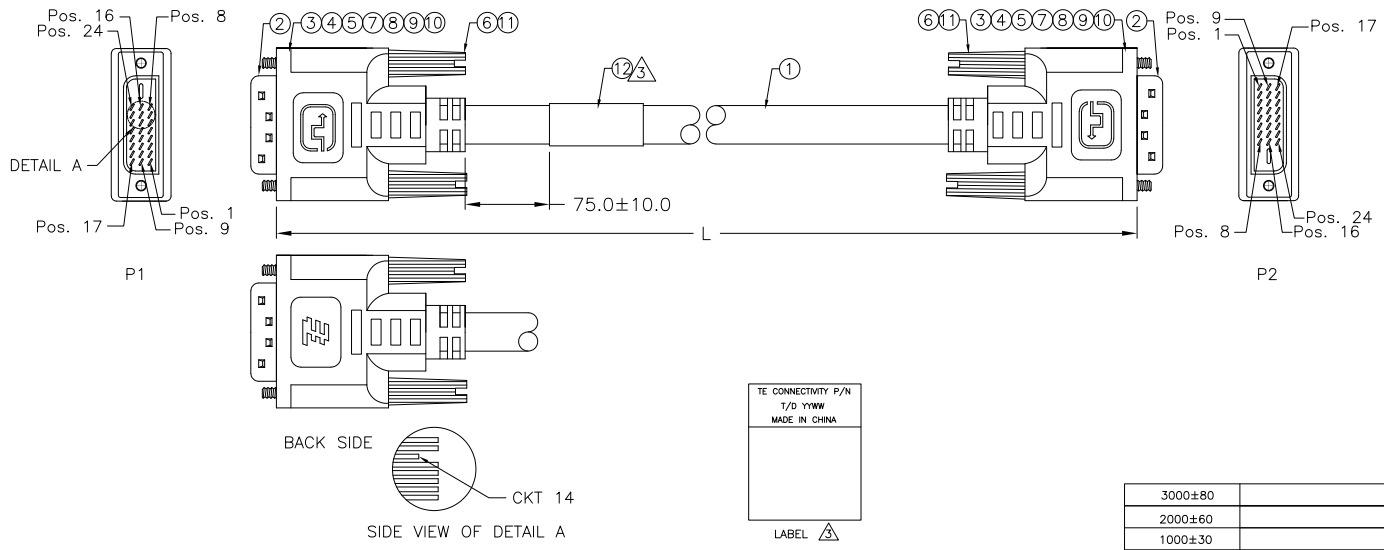

TE CONNECTIVITY P/N
T/D YYWW
MADE IN CHINA

LABEL 3

LENGTH(L)	CUSTOMER P/N	PART NO.
3000±80		1653928-3
2000±60		1653928-2
1000±30		1653928-1

	-3	-2	-1	U/M	DESCRIPTION	ITEM
3	1	1	1	PC	Label Size: 25.0*50.0, White: 25.0*13.0mm.	12
	4	4	4	PC	DVI #4-40 3*45mm Thumbscrew.	11
	AR	AR	AR	MR	Copper Foil, W: 8mm.	10
	AR	AR	AR	KG	PVC, Shore A 90±3, Color: White (WH01).	9
	AR	AR	AR	MR	Heat Shrink Tubing, OD:18.0mm, Color: Black.	8
	AR	AR	AR	MR	Heat Shrink Tubing, OD:1.0mm, Color: Black.	7
	AR	AR	AR	KG	PVC, Shore A 95±3, Color: White (WH01).	6
	AR	AR	AR	MR	Heat Shrink Tubing, OD:1.5mm, Color: Black.	5
	AR	AR	AR	MR	Heat Shrink Tubing, OD:2.0mm, Color: Black.	4
	2	2	2	PC	Metal Can For DVI Connector.	3
	2	2	2	PC	DVI-D Dual Channel, 24Pin+1Pin, Gold Flash	2
	AR	AR	AR	MR	UL20276 (1P*28AWG+Drain+AL/Mylar)*7+(1P+3C)* 28AWG+Al/Mylar+Braid. Color: Black(BK01)	1

PIN ASSIGNMENT :



NOTES:
1. CABLE SHALL BE TESTED WITH AUTOMATED TEST EQUIPMENT FOR THE FOLLOWING:
   A. CONNECTION RESISTANCE SHALL NOT EXCEED 1.8 OHMS.
   B. INSULATION RESISTANCE 1000 MEGOHMS, MIN.
   C. HIPOT-300 VOLTS AT 0.01 SEC.
2. CABLE ASSEMBLY MUST PASS DVI 1.0 SPECIFICATION.
3. CABLE LABEL TO BE APPLIED AS SHOWN.
4. 100% DISPLAY-SCREEN FUNCTIONAL TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN 22JAN03 JURRY LIU
CHK 11JUN04 MONTGOMERY,JOHN D
APVD 11JUN04 MONTGOMERY,JOHN D
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME DVI-D TO DVI-D DUAL LINK CABLE ASSEMBLY
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1653928	—

CUSTOMER DRAWING | SCALE N.T.S | SHEET 1 OF 1 | REV F1

1653928

1471-9 (3/11)

Downloaded from Elcodis.com electronic components distributor