






# Heyclip™ Nonlocking Wire Clips

## Adhesive-Backed

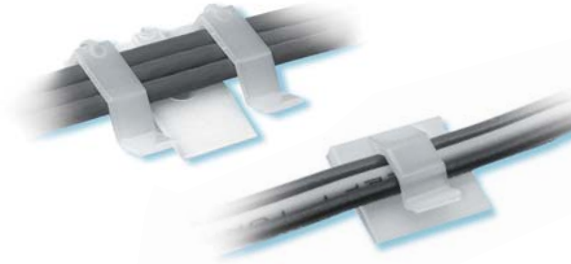


PART NO.	DESCRIPTION	PART DIMENSIONS					
		Bundle Diameter		Overall Height		Base	
		in.	mm.	in.	mm.	in.	mm.
3638	WCA-4	.125 x .250	3,2 x 6,4	.250	6,4	.625 x .625	15,9 x 15,9
3629	WCA-43	.190	4,8	.313	7,9	.625 x .625	15,9 x 15,9
3636	WCA-44	.250	6,4	.375	9,5	.625 x .625	15,9 x 15,9
3637	WCA-46	.375	9,5	.500	12,7	.750 x .750	19,1 x 19,1
3639	WCA-5	.125 x .500	3,2 x 12,7	.313	7,9	1.000 x 1.125	25,4 x 28,6

Standard color natural.



WC A-44  
WC A-46



- 6/6 Nylon with a 94V-2 flammability rating.
- Gathers and directs cables singly or in groups smaller than those accommodated by Heyco Wire Holders.
- WCA-5 may also be screw mounted. #6 screws not included.



# Heyclip™ Flat Wire Clips

## Adhesive-Backed



WILL FIT THESE CABLES	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A		B		C	
			in.	mm.	in.	mm.	in.	mm.
For 1 to 20 conductors	3788	FWCA 1	1.00	25,4	.56	14,2	.27	6,9
For 20 or more conductors	3789	FWCA 20	1.00	25,4	1.00	25,4	.27	6,9

Standard color clear.

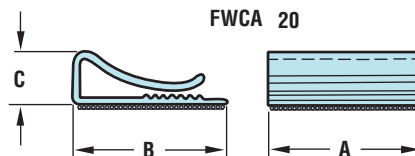

- Made of PVC with a 94V-0 flammability rating.
- Organizes and retains ribbon cable but will work with other flat wires/cables.
- Flat cable is easily inserted or removed from FWCA 1 or FWCA 20. A serrated inner base reduces slippage once the cable is installed in the clip.
- Quick and easy installation—simply peel off backing and press into place.
- Recommended storage temperature from 60°F (16°C) to 80°F (27°C), and approximate relative humidity of 50%.
- Apply to a clean dry surface.