




Heyco® Thick Panel Dome Plugs

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A		B	
in.	mm.	in.	mm.			Head Diameter in.	mm.	Overall in.	Height mm.	
.250	6,4	.500	12,7	3004	3005	DPT-500	.578	14,7	.562	14,3
.250	6,4	.625	15,9	3006*	3007*	DPT-625	.718	18,2	.562	14,3
.250	6,4	.750	19,1	3008*	3009*	DPT-750	.921	23,4	.562	14,3
.250	6,4	.875	22,2	3044	3045	DPT-875	1.015	25,8	.562	14,3
.250	6,4	1.000	25,4	3046	3047	DPT-1000	1.203	30,6	.562	14,3
.250	6,4	1.093-1.125	27,8-28,6	3018	3019	DPT-1093	1.218	30,9	.562	14,3
.250	6,4	1.187	30,1	3100	3101	DPT-1187	1.312	33,3	.562	14,3
.250	6,4	1.250	31,7	3102	3103	DPT-1250	1.375	34,9	.562	14,3
.250	6,4	1.375	34,9	3106	3107	DPT-1375	1.500	38,1	.562	14,3
.250	6,4	1.500	38,1	3048	3049	DPT-1500	1.671	42,4	.562	14,3
.250	6,4	1.750	44,5	3027	3028	DPT-1750	1.906	48,4	.562	14,3
.250	6,4	2.000	50,8	3050	3051	DPT-2000	2.170	55,1	.580	14,7

Standard color black. Consult Heyco for other colors.
 Locking fingers in fractional increments up to the maximum panel thickness.
 Approximate Head Thickness: .063" (1,6 mm). Thickness may vary.
 *Depicts single panel design.

- Closes unneeded panel holes and electrical knock-outs.
- A convex, matte finish head that tapers to a thin edge.
- Locking fingers snap into holes with fingertip pressure for quick and easy installation.
- Withstands a push back force of 35 pounds.
- Available in multiple sizes for use in .500" (12,7 mm) to 2.00" (50,8 mm) diameter holes for panel thickness up to .250" (6,4 mm).

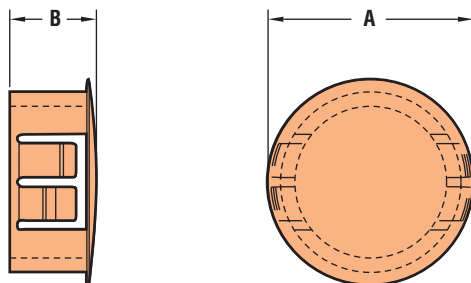

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221° (105°C)

Quick Specs