


**PSD-S AE SP1-3 100DB/2**

Order No.: 2700137

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2700137>Siren element, pulse tone, 24 V DC, self-regulating volume,  
max. 100 dB(A), black

Commercial data	
GTIN (EAN)	 4 046356 491297
Note	Made-to-order
sales group	K462
Pack	1 pcs.
Customs tariff	85318095
Catalog page information	Page 313 (AX-2011)

## Product notes

WEEE/RoHS-compliant since:  
02/02/2009

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data**

General data	
Diameter	71.5 mm
Height	110 mm
Material	Polycarbonate PC
Color	black
Weight	122 g

---

Ambient temperature (operation)	-20 °C ... 50 °C
Degree of protection	IP65, when installed
Mounting position	Any

**Electrical data**

Input voltage	24 V DC
Maximum inrush current	max. 500 mA
Current consumption	150 mA
Service life, electrical	min. 5,000 h
Operating time	100 %
Type of acoustic signal	Pulse tone, automatic volume control
Signal frequency	Approx. 1 Hz
Tone frequency	Approx. 2.5 kHz
Volume	80 dB(A) ... max. 100 dB(A)

**Approvals / conformities**

Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
-------------------------------	--

**Certificates / Approvals**




Certification

CUL Listed, UL Listed

**Diagrams/Drawings**

Dimensioned drawing

---

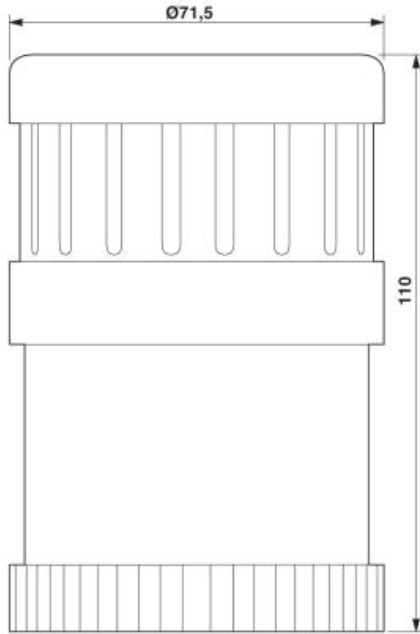

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;