
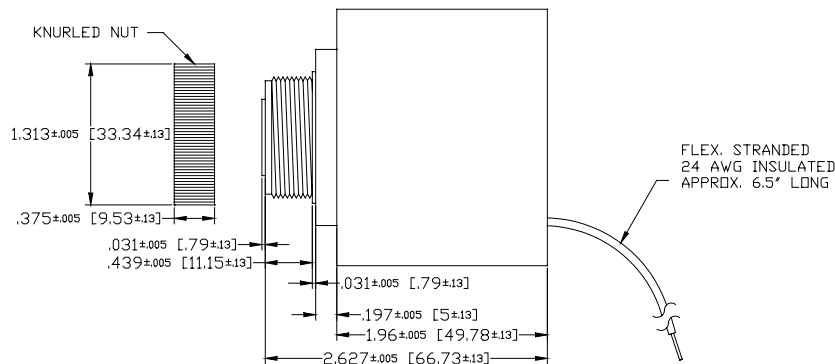


**Specifications:**

Sound level Category	Medium Sound Level
Mode of Operation	Chime, DING-DONG
Mounting	Panel (see note)
Voltage Rating	20 to 28 Vdc
Frequency	750 - 912 Hz
Loudness (Min. Voltage)	85 dB(A) min. @ 2 FT and 20 Vac/dc
Loudness (Max Voltage)	88 dB(A) min. @ 2FT and 28 Vac/dc
Current Draw	250 mA Max @ 20 Vac/dc
Current Draw	250 Ma Max @ 28 Vac/dc
Storage Temperature	-40°C to +85°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	6 oz (170 g)
Housing	6/6 Nylon, Color Black
Options	For other options contact factory

**Dimensions:** Inches (mm)

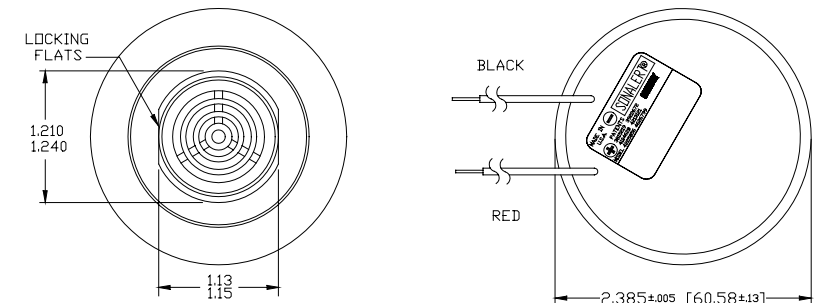

NOTE: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.