




Heyco® Knock-Out Seals

- Plugs electrical knock-outs.
- Molded in gray color to resemble galvanized steel.
- Multiple trade sizes fit 1/2" to 2" knock-out holes.
- Locks firmly in boxes up to 1/8" thick, except for KOS2 and KOSTs which lock firmly in boxes up to 1/4" thick.
- Installs quickly with fingertip pressure (no tool required).
- Economical.

PANEL DIMENSIONS				TRADE SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS			
Maximum Thickness	Mounting Hole Diameter		Silver Gray				A		B	
in.	mm.	in.		mm.	Head Diameter	Overall Height	in.	mm.	in.	mm.
.125	3,2	.875	22,2	1/2	3997	KOS 1/2	1.015	25,8	.453	11,5
.125	3,2	1.093	27,8	3/4	3998	KOS 3/4	1.218	31,0	.453	11,5
.125	3,2	1.375	34,9	1	3999	KOS 1	1.500	38,1	.453	11,5
.125	3,2	1.750	44,5	1-1/4	4000	KOS 1-1/4	1.906	48,4	.453	11,5
.125	3,2	2.000	50,8	1-1/2	4001	KOS 1-1/2	2.140	54,4	.453	11,5
.250	6,4	2.500	63,5	2	4002	KOS 2	2.730	69,3	.750	19,1


Standard color silver gray. Locking fingers in fractional increments up to the maximum panel thickness. Approximate Head Thickness: .063" (1,6 mm). Thickness may vary.

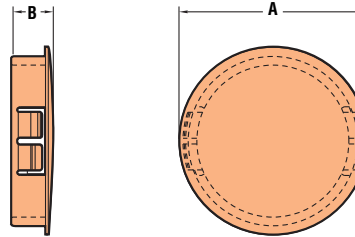

Heyco® Thick Panel Knock-Out Seals

PANEL DIMENSIONS				PART NO.	TRADE SIZE	PART DIMENSIONS			
Maximum Thickness	Mounting Hole Diameter		Silver Gray			A		B	
in.	mm.	in.		mm.	Head Diameter	Overall Height	in.	mm.	in.
.250	6,4	.875	22,2	3991	KOST 1/2	1.015	25,8	.562	14,3
.250	6,4	1.093	27,8	3992	KOST 3/4	1.218	31,0	.562	14,3
.250	6,4	1.375	34,9	3993	KOST 1	1.500	38,1	.562	14,3
.250	6,4	1.750	44,5	3994	KOST 1-1/4	1.906	48,4	.562	14,3
.250	6,4	2.000	50,8	3995	KOST 1-1/2	2.140	54,4	.579	14,7
.250	6,4	2.500	63,5	4002	KOS 2	2.730	69,3	.750	19,1

Standard color silver gray. Locking fingers in fractional increments up to the maximum panel thickness. Approximate Head Thickness: .063" (1,6 mm). Thickness may vary.

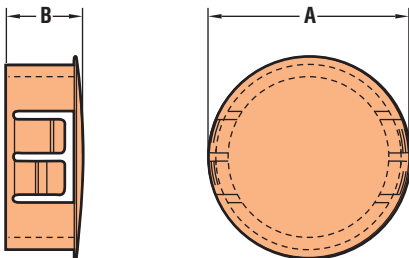

Quick Specs

Material: 6/6 Nylon
 Certifications: Recognized under the Component Program of Underwriters' Laboratories, File E51579
 Certified by Canadian Standards Association, File LR8919
 Flammability Rating: 94V-2
 Material Temperature Index: 275°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)