




Heyco® Halogen and Phosphorous-Free 94V-0 Hole Plugs

Heat Stabilized! Self Extinguishing! Nontoxic! UV Resistant!


- Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases. Also formulated for sunlight resistance. Other Heyco products are available in this material—please consult Heyco.
- Closes unneeded panel holes.
- Convex, matte finish head tapers to a thin edge (Except HFP-187 glossy finish).
- Multiple sizes for use in .187" (4,7 mm) to 2" (50,8 mm) diameter holes. Consult Heyco for larger sizes.
- Locks firmly into panel up to .125" (3,2 mm) thick.
- Quick and easy installation.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter				A Head Diameter		B Overall Height	
in.	mm.	in.	mm.	Black		in.	mm.	in.	mm.
.062	1,6	.187	4,7	2593*	HFP-187	.265	6,7	.240	6,1
.062	1,6	.250	6,4	2606*	HFP-250	.312	7,9	.312	7,9
.062	1,6	.312	7,9	2616*	HFP-312	.375	9,5	.312	7,9
.125	3,2	.375	9,5	2623	HFP-375	.468	11,9	.406	10,3
.125	3,2	.437	11,1	2636	HFP-437	.531	13,5	.406	10,3
.125	3,2	.500	12,7	2646	HFP-500	.570	14,5	.406	10,3
.125	3,2	.625	15,9	2666	HFP-625	.734	18,6	.421	10,7
.125	3,2	.750	19,1	2686	HFP-750	.921	23,4	.406	10,3
.125	3,2	.875	22,2	2706	HFP-875	1.015	25,8	.453	11,5
.125	3,2	1.000	25,4	2716	HFP-1000	1.203	30,6	.453	11,5
.125	3,2	1.093	27,8	2729	HFP-1093	1.218	30,9	.453	11,5
		1.125	28,6						
.125	3,2	1.250	31,7	2749	HFP-1250	1.375	34,9	.453	11,5
.125	3,2	1.375	34,9	2759	HFP-1375	1.500	38,1	.453	11,5
.125	3,2	1.500	38,1	2769	HFP-1500	1.671	42,4	.453	11,5
.125	3,2	1.750	44,5	2779	HFP-1750	1.906	48,4	.453	11,5
.125	3,2	2.000	50,8	2789	HFP-2000	2.170	55,1	.469	11,9

Standard color black.
 Locking fingers in fractional increments up to the maximum panel thickness.
 *Depicts single panel thickness design.
 Approximate Head Thickness: .063" (1,6 mm).

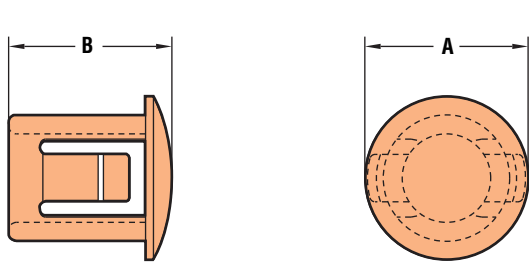

SINGLE PANEL THICKNESS DESIGN*

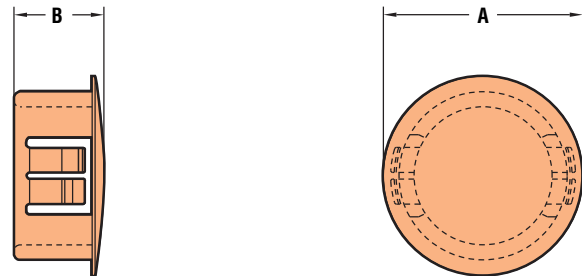

MULTIPLE PANEL THICKNESS DESIGN

Quick Specs

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E51579 Certified by the Canadian Standards Association File LR8919
Flammability Rating	94V-0
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)