

3G3MV SYSDRIVE AC Inverters



Compact, general purpose AC inverter delivers reliable speed control and easy integration with PLCs

Sensing tomorrow[™]

Advanced speed control in a compact package

Omron's SYSDRIVE 3G3MV Series AC Inverter

Giving you the perfect combination of advanced speed control and customized functionality in an extraordinarily compact housing! This powerful inverter really delivers.

- Its maximum output frequency of 400Hz makes it ideal for small motor control (1/8 – 12.5 HP) in a wide variety of applications
- It is feature-packed with 179 user-configurable parameters that let you customize the inverter's operation to your specific application.

This small but powerful inverter is easy to set up, wire and operate. What's more, the 3G3MV inverter lets you select the control method that best suits your needs – sensorless voltage vector control or standard Volts/Hz. Standard models provide energy saving function and PID control.



SHOWN AT ACTUAL SIZE - 128 mm (5.04 in.)

Compact And Cost Effective

Measuring only 5 inches high, it will fit in the smallest spaces, saving you panel space and size. Easily mount the 3G3MV on a DIN rail using its DIN rail-mounting bracket.

Easy To Set Up, Run And Monitor

The simple digital operator controls all function selections and operation. Despite its incredible 179-parameter configurability, all settings are defaulted to typical use settings that let you get up and running quickly. In addition, a convenient analog speed dial allows easy adjustment to the exact speed for your application.

Versatile Communications

The 3G3MV inverters support RS-422 and RS-485 communications and can support DeviceNet via an optional communications board.

Multi-Function I/O


Wiring the 3G3MV is simple with easy to use screw terminals that accept 0 -10 V, 4-20 mA or 0 - 20 mA analog signals or pulse train inputs between 0.1 kHz and 33 kHz (scalable). It also offers analog and digital outputs for direct monitoring and control. The multi-function inputs can be set to either PNP or NPN, providing flexibility in input signals.

Extensive Protective Functions

With its built-in stall prevention, ground fault protection, and auto recovery functions, you can count on the 3G3MV for reliable operation. The unit also features built-in functions like current limit and UL listed thermal overload protection to prevent damage and downtime, while ensuring smooth motor operation.

Sensorless Vector Control

Choose Volts/Hz for general purpose applications or sensorless Voltage Vector control when high torque output at low speeds is critical (150% torque at 1 Hz).

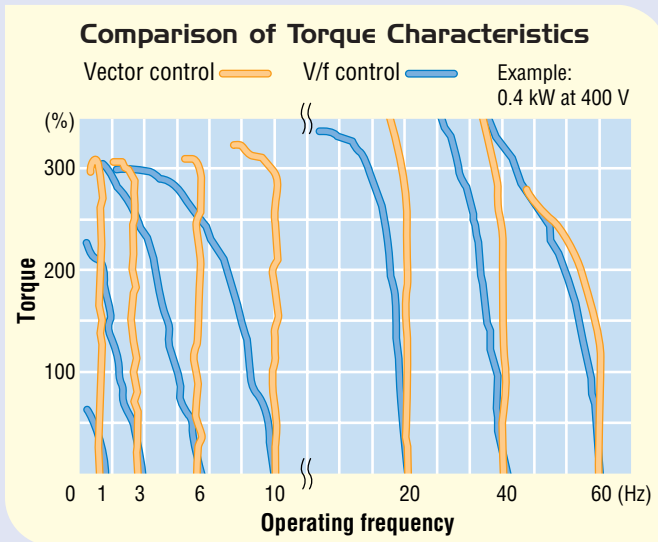

Special functions include:

- Programmable soft starts
- Motor slip compensation
- 16 preset speeds
- Full range automatic torque boost
- Speed search
- PID control
- Multi-function I/O
- Energy saving function
- Stall prevention
- Parameter copy function
- Skip frequencies

The 3G3MV gives you the performance and reliability of larger inverters at a fraction of the size and cost.

Intuitive Digital Operator

From set up to wiring, the SYSDRIVE 3G3MV is designed for simplicity. Its user-friendly digital operator gives you easy access to all 179 of the inverter's user selectable parameters. Additionally, the parameter copy function allows you to set up

one inverter, save the parameters to the digital operator's memory and download them into multiple 3G3MV inverters. This function can also be used to verify parameters between the digital operator and an inverter.

4-digit data display shows the drive's operating conditions, parameter values and fault codes. While the default is Hz, the 3G3MV can be scaled to read out in engineering units like RPM.

Quick start LEDs simplify monitoring the inverter's status

FREF - frequency reference can be monitored or set

FOUT - output frequency can be monitored

IOUT - output current can be monitored

MNTR - monitor the status of important settings such as error logs, input & output terminal status, and PID characteristics

F/R - direction of rotation can be selected or viewed

LO/RE - operation from digital operator or set parameters can be selected

PRGM - all accessible parameters can be set or monitored

Face-mounted analog dial provides easy speed control

Operation keys offer simple access to parameters. Increase or decrease parameter numbers, set numbers and multi-function monitor numbers.


Use the digital operator's access control function to protect crucial parameter values



Small in size, not in application


Industry

- Food/Beverage Processing
- HVAC
- Machine Tool
- Printing
- Textiles
- Petrochemical Processing
- General Manufacturing
- Material Handling

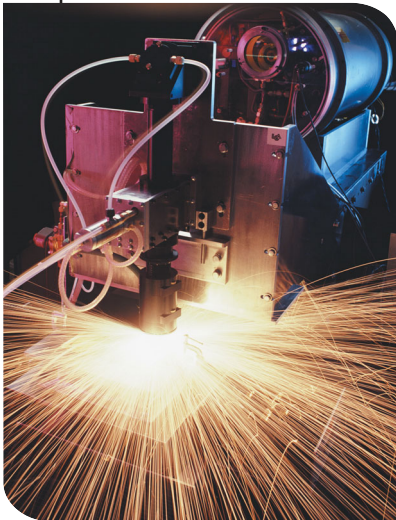

Applications


- Pumps
- Fans
- Conveyors
- Mixers
- Hoists
- Blowers
- Compressors
- Packaging

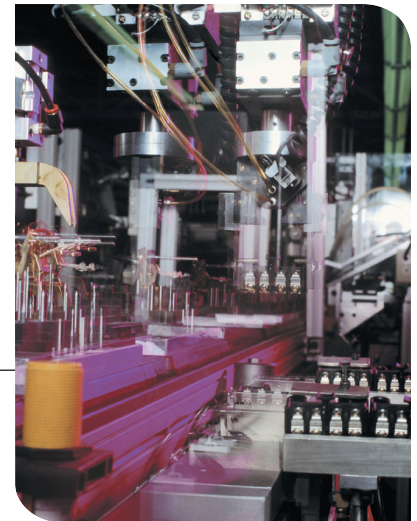

PLC Option Board

With Omron's 3G3MV inverter and PLC Option Board, you can bring more intelligence to your system by enhancing the speed and position control of your application. The 3G3MV-P10CDT Option Board offers the features of an Omron CPM2C-S PLC embedded directly into the inverter, providing single-point programming. The inverter-based design provides wireless installation and seamless integration with inverter parameters and I/O. Standard Omron software tools are used for programming and start-up.

The 3G3MV-P10CDT is the perfect integrated solution for door control, pump sequencing, axis control, and general positioning. It can provide distributed control for an entire line, and because of its modular concept, your system can grow as your needs do. Six inputs and four outputs are available in the 3G3MV-P10CDT, with an instruction execution time of less than 8 μ s. Omron's CX-Programmer and SYSDRIVE Configurator connect through standard serial connections.

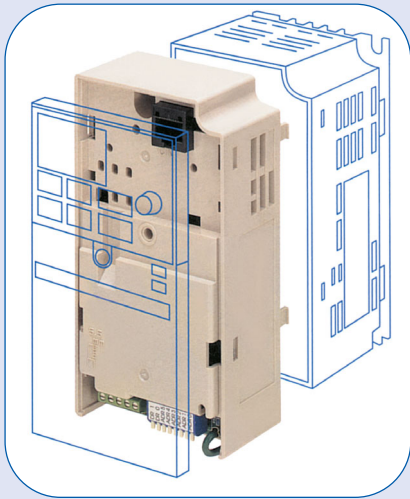

DeviceNet Communication Unit

The 3G3MV-PDRT2 DeviceNet Communications Unit makes it possible for the SYSDRIVE 3G3MV to communicate over DeviceNet. The unit permits a PLC to monitor Run/Stop and operating conditions and make changes in set values. Remote I/O communications and message communications can be used simultaneously between the PLC and 3G3MV inverter.

Ordering Information

Rated Voltage	Enclosure Type	Rated Output Current (A)	Nominal Horsepower (kW)	Part Number
3-Phase 230 VAC	NEMA-1 <i>For Open-Chassis IP-20 Models: replace C with A in part number</i>	.8	.13 (0.1)	3G3MV- C 2001
		1.6	.25 (0.2)	3G3MV- C 2002
		3.0	.5/.75 (0.4)	3G3MV- C 2004
		5.0	1.0 (0.75)	3G3MV- C 2007
		8.0	2.0 (1.5)	3G3MV- C 2015
		11.0	3.0 (2.2)	3G3MV- C 2022
		17.5	5.0 (3.7)	3G3MV- C 2037
		25	7.5 (5.5)	3G3MV- C 2055
		33	10 (7.5)	3G3MV- C 2075
Single-Phase 230 VAC	NEMA-1 <i>For Open-Chassis IP-20 Models: replace C with A in part number</i>	.8	.13 (0.1)	3G3MV- C B001
		1.6	.25 (0.2)	3G3MV- C B002
		3.0	.5/.75 (0.4)	3G3MV- C B004
		5.0	1.0 (0.75)	3G3MV- C B007
		8.0	2.0 (1.5)	3G3MV- C B015
		11.0	3.0 (2.2)	3G3MV- C B022
		17.5	5.0 (3.7)	3G3MV- C B037
3-Phase 460 VAC	NEMA-1 <i>For Open-Chassis IP-20 Models: replace C with A in part number</i>	1.8	1.0 (0.4)	3G3MV- C 4004
		3.4	1.5/2 (0.75)	3G3MV- C 4007
		4.8	3.0 (1.5)	3G3MV- C 4015
		5.5	3.0 (2.2)	3G3MV- C 4022
		8.6	5.0 (3.7)	3G3MV- C 4037
		14.8	10 (5.5)	3G3MV- C 4055
		18	12.5 (7.5)	3G3MV- C 4075

Note: Nominal HP rating based on standard 1800 RPM motor amperage. Please consult factory or refer to operation manual for MV-4X part numbers.

Description	Applicable Inverter Models	Part Number	
PLC Option Board	All models	3G3MV-P10CDT	
DeviceNet Communications Unit	All models	3G3MV-PDRT2	
DIN Rail Mounting Bracket	3-Phase, 230 VAC	3G3MV-□2001/-□2002/-□2004/-□2007	3G3IV-PEZZ08122A
		3G3MV-□2015/-□2022	3G3IV-PEZZ08122B
		3G3MV-□2037	3G3IV-PEZZ08122C
	Single-Phase, 230 VAC	3G3MV-□B001/-□B002/-□B004	3G3IV-PEZZ08122A
		3G3MV-□B007/-□B015	3G3IV-PEZZ08122B
		3G3MV-□B022	3G3IV-PEZZ08122C
		3G3MV-□B037	3G3IV-PEZZ08122D
	3-Phase, 460 VAC	3G3MV-□4002/-□4004/-□4007/-□4015/-□4022	3G3IV-PEZZ08122B
		3G3MV-□4037	3G3IV-PEZZ08122C

Specifications


Voltage Class		230 VAC single- / three-phase								460 VAC three-phase								
Part numbers	MODEL 3G3MV-	Three-phase NEMA-1	C2001	C2002	C2004	C2007	C2015	C2022	C2037	C2055	C2075	C4004	C4007	C4015	C4022	C4037	C4055	C4075
		Three-phase IP-20	A2001	A2002	A2004	A2007	A2015	A2022	A2037	A2055	A2075	A4004	A4007	A4015	A4022	A4037	A4055	A4075
		Single-phase NEMA-1	CB001	CB002	CB004	CB007	CB015	CB022	CB037	-	-	-	-	-	-	-	-	-
		Single-phase IP-20	AB001	AB002	AB004	AB007	AB015	AB022	AB037	-	-	-	-	-	-	-	-	-
NEMA 4X MODEL V7CU-		-	20P24	20P44	20P74	21P54	22P24	23P74	25P54	27P54	40P44	40P74	41P54	42P24	43P74	45P54	47P54	
Max. Applicable Motor Output*1 HP (kW)		0.13 (0.1)	0.25 (0.2)	0.5/7.5 (0.4)	1 (0.75)	2 (1.5)	3 (2.2)	5 (3.7)	7.5 (5.5)	10 (7.5)	1 (0.4)	1.5/2 (0.75)	3 (1.5)	3.5 (2.2)	5 (3.7)	10 (5.5)	12.5 (7.5)	
Output Characteristics	Inverter Capacity (kVA)	0.3	0.6	1.1	1.9	3.0	4.2	6.7	9.5	13.0	1.4	2.6	3.7	4.2	7.0	11.0	14.0	
	Rated Output Current (A)	0.8	1.6	3	5	8	11	17.5	25	33	1.8	3.4	4.8	5.5	8.6	14.8	18	
	Max. Output Voltage (V)	3-phase, 200 to 230 V (proportional to input voltage) Single-phase, 200 to 240 V (proportional to input voltage)										3-phase, 380 to 400 V (proportional to input voltage)						
	Max. Output Frequency (Hz)	400 Hz (Programmable)																
Power Supply	Rated Input Voltage and Frequency	3-phase, 200 to 230 V, 50/60Hz Single-phase, 200 to 240 V, 50/60Hz										3-phase, 380 to 460 V, 50/60Hz						
	Allowable Voltage Fluctuation	-15% to +10%																
	Allowable Frequency Fluctuation	±5%																
Control Characteristics	Control Method	Sine wave PWM (V/f control/voltage vector control selectable)																
	Frequency Control Range	0.1 to 400Hz																
	Frequency Accuracy (Temperature Change)	Digital reference: ±0.01% (-10 to +50°C) Analog reference: ±0.5% (25±10°C)																
	Frequency Setting Resolution	Digital reference: 0.01 Hz (less than 100 Hz)/0.1 Hz (100 Hz or more) Analog reference: (0:06/60 Hz) equivalent to 1/1000 of max. output frequency																
	Output Frequency Resolution	0.01 Hz																
	Overload Capacity	150% rated output current for one minute																
	Frequency Reference Signal Accel/Decel Time	0 to 10 VDC (20 kΩ), 4 to 20 mA (250 Ω), 0 to 20 mA (250 Ω) pulse train input, frequency setting potentiometer (Selectable) 0.00 to 6000 sec. (accel/decel time are independently programmed 2 types)																
	Braking Torque	Short-term average deceleration torque*: 0.1, 0.25 kW (0.13 HP, 0.25 HP): 150%; 0.55, 1.1 kW: (0.5 HP, 1 HP): 100% 1.5 kW (2 HP): 50%; 2.2 kW (3 HP) or more: 20% Continuous regenerative torque: Approx. 20% (150% with optional braking resistor, braking transistor built-in)																
	V/f Characteristics	Possible to program any V/f pattern																
Protective Functions	Motor Overload Protection	Electronic thermal overload relay																
	Instantaneous Overcurrent	Motor coasts to a stop at approx. 250% of inverter rated current																
	Overload	Motor coasts to a stop after 1 minute at 150% of inverter rated output current																
	Overvoltage	Motor coasts to a stop if DC bus voltage exceed 410 V										Motor coasts to a stop if DC bus voltage exceeds 820 V						
	Undervoltage	Stops when DC bus voltage is approx. 200 V or less (approx. 160 V or less for single-phase series)										Stops when DC bus voltage is approx. 400 V or less						
	Momentary Power Loss	Stops for 15ms or more. By setting inverter, operation can be continued if power is restored within approx. 0.5s																
	Cooling Fin Overheat	Protected by electronic circuit																
	Stall Prevention Level	Can be set individually during accel/decel, provided/not provided available during coast to a stop																
	Cooling Fan Fault	Protected by electronic circuit (fan lock detection)																
	Ground Fault	Protected by electronic circuit (overcurrent level)																
Power Charge Indication	ON until the DC bus voltage becomes 50V or less. RUN lamp stays ON or digital operator LED stays ON.																	
Environmental Conditions	Cooling Method	Cooling fan is provided for the following models: 200 V, 0.75 kW or larger inverters (3-phase) 200 V, 1.5 kW or larger inverters (single-phase) Others models are self-cooling																
	Ambient Temperature	Open chassis IP20: -10 to +50°C (14 to 122°F) Open chassis IP20 (Top-closed type) and enclosed wall mounted NEMA-1: -10 to +40°C (14 to 105°F) (not frozen)																
	Humidity	95% RH or less (non-condensing)																
	Storage Temperature*3	-4 to 140°F (-20 to +60°C)																
	Location	Indoor (free from corrosive gases or dust)																
	Elevation	3280 ft (1000 m) or less																
Other Functions	Wiring Distance	328 ft (100 m) or less between Inverter and Motor																
	Input Signals	Multi-function Input	Seven of the following input signals are selectable: Forward/reverse run (3-wire sequence), fault reset, external fault (NO/NC contact input), multi-step speed operation, Jog command, accel/decel time select, external baseblock (NO/NC contact input), speed search command, UP/DOWN command, accel/decel hold command, LOCAL/REMOTE selection, communication/control circuit terminal selection, emergency stop fault, emergency stop alarm, self test, PID control cancel, PID integral reset/hold															
	Output Signals	Multi-function Output	Following output signals are selectable (1 NO/NC contact output, 2 photo-coupler outputs): Fault, running, zero speed, at frequency, frequency detection (output frequency ≤ or ≥ set value), during overtorque detection, during undervoltage detection, minor error, during baseblock, operation mode, inverter run ready, during fault retry, during UV, during speed search, data output through communication, PID feedback loss detection															
Standard Functions	Voltage vector control, full-range automatic torque boost, slip compensation, DC injection braking current/time at start/stop frequency reference bias/gain, MEMOBUS communications (RS-485/422, max. 19.2 K bps), PID control, energy-saving control, parameter copy, frequency reference with built-in potentiometer																	

*1: Based on a standard 4-pole motor for max. applicable motor output. Select the inverter model within the allowable motor rated current

*2: Shows deceleration torque for uncoupled motor decelerating from 60 Hz with the shortest possible deceleration time

*3: Temperature during shipping (for short period)


Dimensions

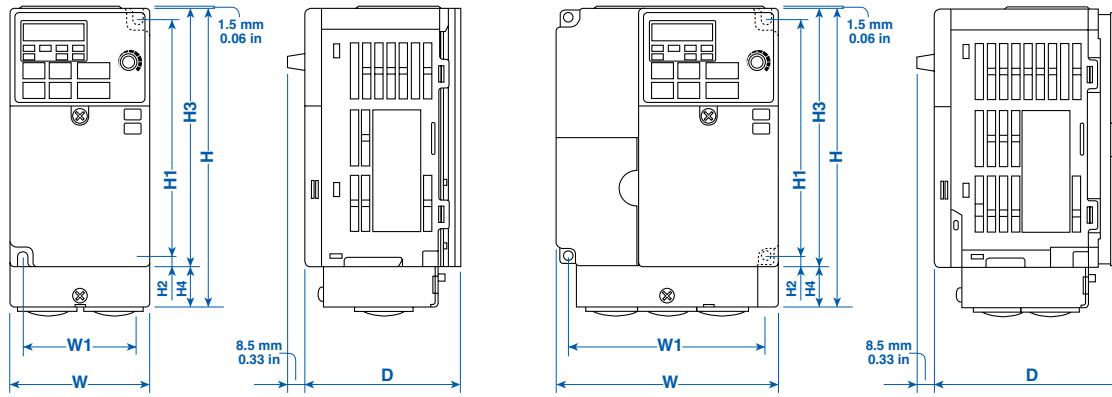

• IP-20 and NEMA 4X model dimensions will vary slightly, please refer to operation manual •

Voltage Class	Model Number		W	H	D	W1	H1	H2	H3	H4
230 VAC 3-Phase	C2001	mm inch	68 2.68	148 5.83	76 2.99	56 2.20	118 4.65	5 0.20	128 5.04	20 0.79
	C2002	mm inch	68 2.68	148 5.83	76 2.99	56 2.20	118 4.65	5 0.20	128 5.04	20 0.79
	C2004	mm inch	68 2.68	148 5.83	108 4.25	56 2.20	118 4.65	5 0.20	128 5.04	20 0.79
	C2007	mm inch	68 2.68	148 5.83	128 5.04	56 2.20	118 4.65	5 0.20	128 5.04	20 0.79
	C2015	mm inch	108 4.25	148 5.83	131 5.16	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C2022	mm inch	108 4.25	148 5.83	140 5.51	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C2037	mm inch	140 5.51	148 5.83	143 5.63	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C2055	mm inch	180 7.09	260 10.24	170 6.69	164 6.46	244 9.61	8 0.32	260 10.24	2.2 0.09
	C2075	mm inch	180 7.09	260 10.24	170 6.69	164 6.46	244 9.61	8 0.32	260 10.24	2.2 0.09
230 VAC Single-Phase	CB002	mm inch	68 2.68	148 5.83	76 2.99	56 2.20	118 4.65	5 0.20	128 5.04	20 0.79
	CB004	mm inch	68 2.68	148 5.83	131 5.16	56 2.20	118 4.65	5 0.20	128 5.04	20 0.79
	CB007	mm inch	108 4.25	148 5.83	140 5.51	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	CB015	mm inch	108 4.25	148 5.83	156 6.14	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	CB022	mm inch	140 5.51	148 5.83	163 6.42	128 5.04	118 4.65	5 0.20	128 5.04	20 0.79
	C2037	mm inch	170 6.69	148 5.83	180 7.09	158 6.22	118 4.65	5 0.20	128 5.04	20 0.79
460 VAC 3-Phase	C4004	mm inch	108 4.25	148 5.83	110 4.43	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C4007	mm inch	108 4.25	148 5.83	140 5.51	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C4015	mm inch	108 4.25	148 5.83	156 6.14	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C4022	mm inch	108 4.25	148 5.83	156 6.14	96 3.78	118 4.65	5 0.20	128 5.04	20 0.79
	C4037	mm inch	140 5.51	148 5.83	143 5.63	128 5.04	118 4.65	5 0.20	128 5.04	20 0.79
	C4055	mm inch	180 7.09	260 10.24	170 6.69	164 6.46	244 9.61	8 0.32	260 10.24	2.2 0.09
	C4075	mm inch	180 7.09	260 10.24	170 6.69	164 6.46	244 9.61	8 0.32	260 10.24	2.2 0.09

Standard Connections

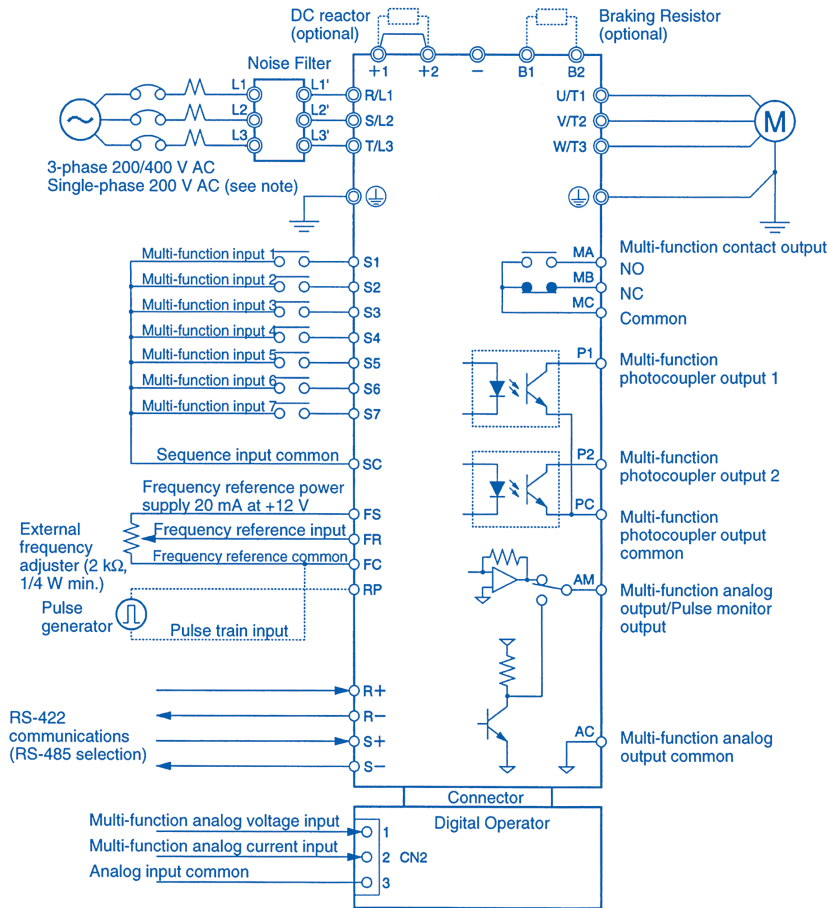

Note: Connect single-phase 230 VAC to terminals R/L1 and S/L2 of the 3G3MV-CB□.

Need an inverter for tough washdown or dust-tight environments?



MV-4X AC Inverter meets NEMA-4X requirements

The compact MV-Series inverter gives you the performance and reliability of larger inverters at a fraction of the size and cost. The new MV-4X provides the water and dust protection required for use in food and beverage processing, machine tools, wood working equipment, and printing machinery. Use this inverter in applications where plant floor equipment gets washed down with liquid, or is exposed to large amounts of dust or corrosives.

OMRON

OMRON IDM CONTROLS INC.
Houston, TX
www.idmcontrols.com

OMRON ELECTRONICS LLC
Schaumburg, IL
www.omron.com/oei

OMRON CANADA, INC.
Toronto, Ontario
www.omron.ca

SB 3G3MV-2 5/03/XM
© 2003 OMRON ELECTRONICS LLC

OMRON IDM HEADQUARTERS
800.395.4106 or 713.849.1900

UNITED STATES REGIONAL SALES OFFICE
847-843-7900

CANADA REGIONAL SALES OFFICE
416.286.6465

MEXICO SALES OFFICES
Florida 954.227.2121 Ciudad Juarez 656.623.7083
Mexico, D.F. 555.534.1195 Monterrey, N.L. 818.377.4281

BRAZIL SALES OFFICE
55.11.5564.6488

ARGENTINA SALES OFFICE - CONO SUR
114.590.2408

AUTHORIZED DISTRIBUTOR:

