


EM-23446-C36

SHEET 2.1

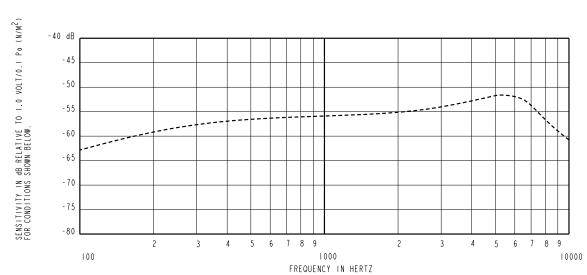

SENSITIVITY FREQUENCY NOM. MAX. 100 -63.0 -56.0 -51.5 -59.0 -53.0 ≈ 5000


DEVICE CONFORMITY RANGE OF DEVIATION FROM IKHZ -3.0 0.0 +7.5 -10.0 0.0

## NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 1.6 VDC SUPPLY.
- 3. TYPICAL SENSITIVITY TO HUMIDITY AT 1000Hz IS 0.03 dB/%RH
- 4. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- 5. CAPACITANCE MEASUREMENT MADE WITH BOONTON MODEL 7200 OR EQUIVALENT WITH APPLIED AC VOLTAGE OF 15 mVOLTS AT IMHz AND 0 VDC. INCLUDES CIRCUIT CAPACITANCE IN PARALLEL WITH CAPACITOR.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	ON DEDUCING CHIDDLY	"A" WEIGHTED NOISE (I KHz EQUIV. SPL)	OUTPUT	UT IMPEDANCE OHMS		CAPACITANCE ±50%	
					MIN.	NOM.	MAX.	1-2	1-3
12B	1.3V	50 μA MAX.	3 dB MAX.	28.0 dB MAX.	2800	4400	6800	30pF	30pF

## CAPACITANCE PROBE POINTS



	Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION	
	E M10102034		6-18-08	l Active		l	
	D	M10101166	6-29-06				
	WHEN TEST	LIMITS ARE US	SED TO ESTABLISH INCOMING	INSPECTION ACCEPTANCE/REJECTION	DR. BY	DATE	

## **KNOWLES ELECTRONICS** ITASCA, ILLINOIS U.S.A.

CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION MMM 7-12-05 TITLE: 7 - 14 - 05 MICROPHONE EM-23446-C36 APP. BY DATE PERFORMANCE SPECIFICATION SHT 2.1

7-14-05