


EK-27276-000 SHEET 2.1

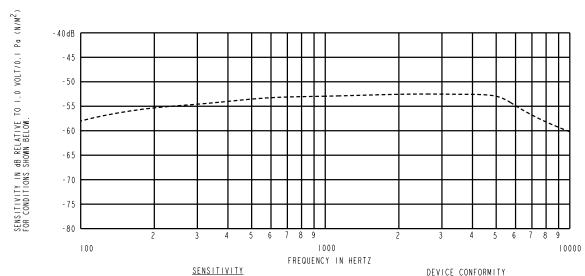

FREQUENCY MIN NOM. MAX. -58.0 -53.0 100 1000 -55.0 -51.0 4500

-52.5

DEVICE CONFORMITY RANGE OF DEVIATION FROM IKHZ - I I . 0 0 . 0 - 3 . 0 -4.0 0.0 +4.0

NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 $\rm H_Z$.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (I kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS		CAPACITANCE ±75%		
					MIN.	NOM.	MAX.	1-2	1-3
128	1.3V	50 μA MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800	N/A	N/A

Revision	sion C.O. # Implementation Date RELEASE LEVE				REVISION
	MINIOLOGO	2 22 00	Released		Α
CRITERIA,	A MI0101060 3-22-06 HEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION VITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR INMINATION OF EQUIPMENT AND TEST METHOD VARIATION				

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

TITLE: 3-31-06 MICROPHONE EK-27276-000 CRG APP. BY DATE PERFORMANCE SPECIFICATION SHT 2.1