


EK-23132-M01

SENSITIVITY IN 4B RELATIVE TO 1.0 VOLT/0.1 Pa (N/M²) FOR CONDITIONS SHOWN BELOW.

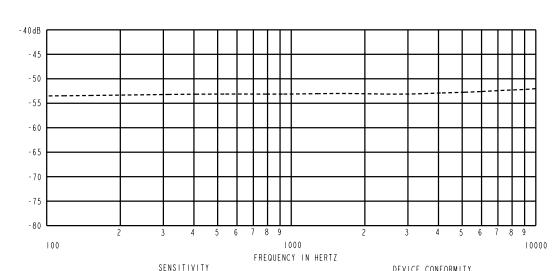

<u> </u>							
FREQUENCY	MIN.	NOM.	MAX.				
100		-53.5					
1000	- 55.0	-53.0	-51.0				
10000		-52 0					

<u>DEVICE CONFORMITY</u>						
RANGE	OF	DEV	IATION	FROM	IKHz	
	- 4	. 0	+ .	0		
	0	. 0	0.			

NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 $\rm H_Z$.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

	PORT DO	DC		SENSITIVITY CHANGE ON REDUCING SUPPLY	"A" WEIGHTED NOISE			CAPACITANCE ±50%			
	LOCATION	SUPPLY	CURRENT DRAIN	TO 0.9VDC	(I kHz EQUIV. SPL)	MIN.	NOM.	MAX.	OUTPUT TO NEGATIVE	OUTPUT TO POSITIVE	POS. TO NEGATIVE
İ	KA	1.3V	50 μA MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800	N/A	N/A	N/A

Revision	C.O. #	Implementation Date	tation Date RELEASE LEVEL		
B	M10101029	INCICUIO CONTRA			В
CRITERIA,	CORRELATION (SED TO ESTABLISH INCOMING OF TEST EQUIPMENT WITH KN IT AND TEST METHOD VARIAT	INSPECTION ACCEPTANCE/REJECTION OWLES IS ALSO REQUIRED FOR ION	DR. BY	DATE 7 - 25 - 05

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.