


EM-23346-C54

SHEET 2.1

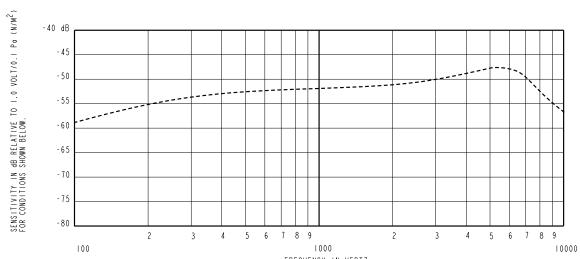

FREQUENCY IN HERTZ

	SENSITIV	<u>ITY</u>			
FREQUENCY	MIN.	NOM.	MAX.		
100		-59.0			
1000	- 55.0	- 52 . 0	-49.0		
≈ 5000		- 47.5			

 DEVICE CONFORMITY

 RANGE OF DEVIATION FROM IKHZ

 -10.0
 -3.0

 0.0
 0.0

 +1.5
 +7.5

SUPPLY IN PACKS WITH 1000 HZ SENSITIVITY GRADES


GRADE	MIN (dB)	MAX. (dB)
Α	-51.0	-49.0
В	-53.0	-51.0
С	-55.0	-53.0

## NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 1.6 VDC SUPPLY.
- 3. TYPICAL SENSITIVITY TO HUMIDITY AT 1000Hz IS 0.03 dB/ $^{\star}$ RH
- 4. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- 5. CAPACITANCE MEASUREMENT MADE WITH BOONTON MODEL 7200 OR EQUIVALENT WITH APPLIED AC VOLTAGE OF 15 mVOLTS AT IMHz AND 0 VDC. INCLUDES CIRCUIT CAPACITANCE IN PARALLEL WITH CAPACITOR.

PORT LOCATION	DC AMPLIFIER SUPPLY CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY	"A" WEIGHTED NOISE	OUTPUT IMPEDANCE OHMS		CAPACITANCE ±50%			
		CURRENT DRAIN	TO 0.9VDC	(I KHz EQUIV. SPL)	MIN.	NOM.	MAX.	1-2	1 - 3
12B	1.3V	50 μA MAX.	3 dB MAX.	28.0 dB MAX.	2800	4400	6800	30pF	30pF

## CAPACITANCE PROBE POINTS



TITLE:

	Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
	E	M10102011	6-10-08	l Active I		F
	D	M10101837	2-1-08			
_	WHEN TEST I	IMITS ARE IIS	SED TO ESTABLISH INCOMING	INSPECTION ACCEPTANCE/REJECTION	DR. BY	DATE

## KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION OR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

MICROPHONE

PERFORMANCE SPECIFICATION

EM-23346-C54 GJP 1-2-06 SHT 2.1 GJP 1-2-06

12-27-05