


EA-21842-035 SHEET 2.1



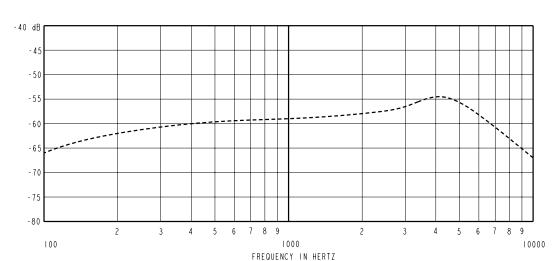

<u>SENSITIVITY</u>						
FREQUENCY	MIN.	NOM.	MAX.			
100		-66.0				
1000	-62.0	-59.0	- 56 . 0			
≈ 4800		-54.5				

<u>DE V</u>	'ICE CONFOR	MITY	
RANGE OF	DEVIATION	FROM	IKHz
-11.0		-4.0	
0.0		0.0	
+1.5		+7.5	

NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATION TEST, SHEET 2.2'.
- 4. CAPACITANCE MEASUREMENT MADE WITH BOONTON MODEL 7200 OR EQUIVALENT WITH APPLIED AC VOLTAGE OF 15 mVOLTS AT I MHz AND 0 VDC. INCLUDES CIRCUIT CAPACITANCE IN PARALLEL WITH CAPACITOR.

	PORT DC LOCATION SUPPLY	AMPLIFIER	SENSITIVITY CHANGE ON REDUCING SUPPLY	"A" WEIGHTED NOISE	OUTPUT	IMPEDANO	CE OHMS	CAPACITA	NCE ±50%	
L		CURRENT DRAIN	TO 0.9VDC	(I kHz EQUIV. SPL)	MIN.	NOM.	MAX.	1 - 2	I - 3	
İ	128	1.3V	50 uA MAX.	3 dB MAX.	28.5 dB MAX.	2000	3500	6000	N A	NA

CK. 87	Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION OF ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION OF ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION OF BY LSY LSY INCOMING INSPECTION OF EUIPMENT AND TEST METHOD VARIATION CK. BY ITTLE: MICROPHONE EA-21842-035				Released		Α
CRITERIA. CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR LSY L. SY	A	M10101315	11-23-06			
ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION TITLE: MICROPHONE EA-21842-035 GJP					DR. BY	DATE
MICROPHONE EA-21842-035					LSY	11-23-06
					CK. BY	DATE
	TITLE:	MIC	ROPHONE	FA-21842-035	GJP	12-8-06
		1411	MOI HOME	LN 21042 000	APP. BY	DATE

SHT 2.1

PERFORMANCE SPECIFICATION

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.