



Bi-Sonic


DC Brushless Motors

433-QMB-12, 433-QMB-24, 433-QMB-48

Date Last Revised: 08/18/09

BI-200043

Dimensions: mm (in.)

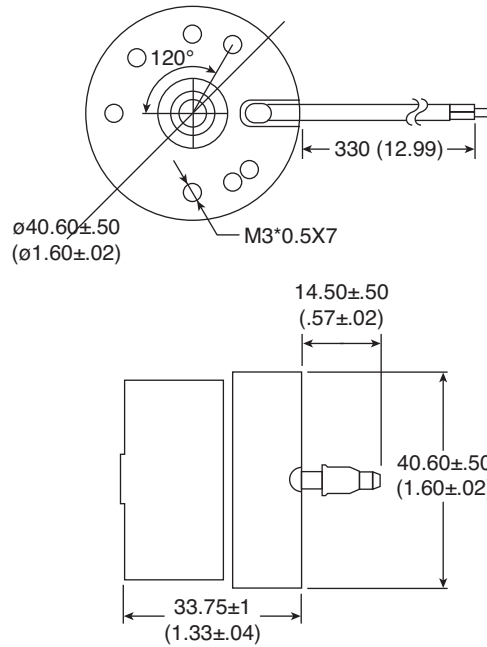

Mouser Stock No.	Rated Voltage (VDC)	Operating Voltage Range (V)	Rated Current (A)	Rated Input Power (W)	Speed (R.P.M.)
433-QMB-12	12	10.2-13.8	0.07	0.84	2600
433-QMB-24	24	20.4-27.6	0.10	2.40	5800
433-QMB-48	48	40.8-55.2	0.11	5.28	6200

Electrical Specifications:

- Insulation resistance: 500VDC 10M Ω min.
- Dielectric strength: 500VAC 60Hz for 1 minute

Mechanical Specifications:

- Operating temperature: -10°C to +70°C
- Weight: 140 grams
- Bearing system: Ball

Note:

- RoHS Compliant by Exemption

Available from Mouser Electronics

1-800-346-6873

www.mouser.com

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.