


<b>DATA SHEET</b> DS/239	<b>SI2KSYSUNO</b> <b>RIBBONS FOR SI2KPRINTUNO PRINTER</b>	<b>DATE</b> 09/01/08
-----------------------------	--	-------------------------

**GRAPHIC REPRESENTATION**

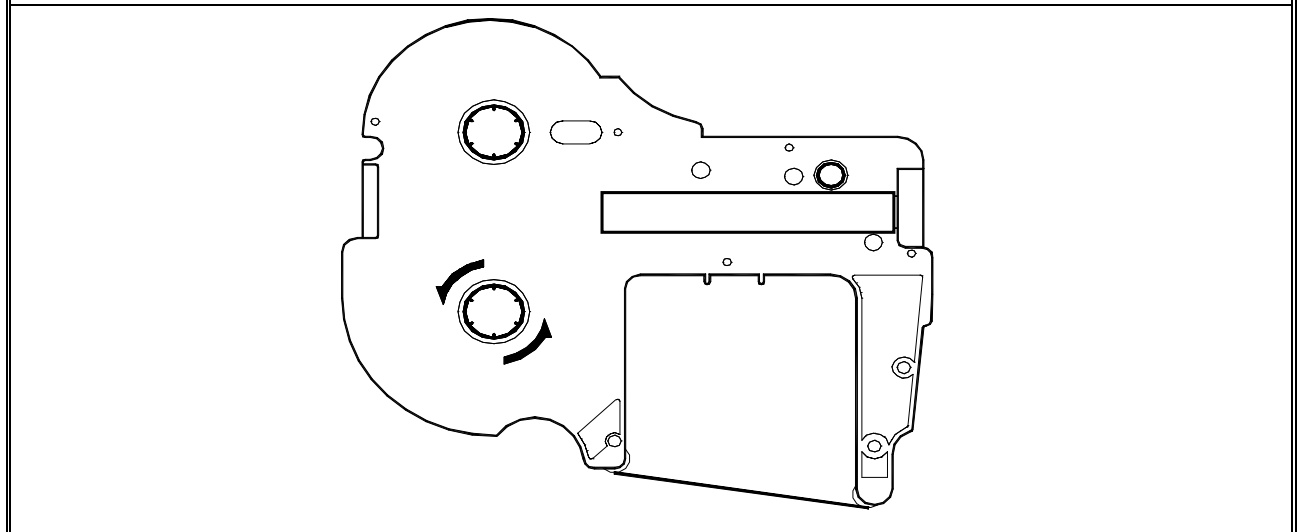

**REFERENCE ITEM CODE**

SI2KSBN/B - SI2KRBN/S - SI2KRBN/RS - SI2KRBN/L - SI2KRBN/R - SI2KRBN/W

**PHYSICAL PROPERTIES**

TEMPERATURE OF USE	+15 ÷ +32,5 °C, Relative humidity 10% ÷ 85%
TEMPERATURE OF WAREHOUSING	+5 ÷ +32 °C, Relative humidity 10% ÷ 85%
LIGHT FASTNESS	Unaltered Black ( ≥ 7 – UNI 5773:1966 - Grey scale)
ALCOHOL RESISTANCE	☺
HEXANE RESISTANCE	☺

**SERIES PROPERTIES**

ITEMS CODE	RIBBON LENGHT	DESCRIPTION	COMPATIBILITY WITH SI2KPRINTUNO
SI2KSBN/B	130	STRONG BLACK RIBBON	ALL FIRMWARE RELEASES
SI2KRBN/R	130	RED RIBBON "PLATE" OPTION	ALL FIRMWARE RELEASES
SI2KRBN/RS	130	RED RIBBON "STACK" OPTION	ALL FIRMWARE RELEASES
SI2KRBN/W	110	WHITE RIBBON	ALL FIRMWARE RELEASES
SI2KRBN/S	130	SILVER RIBBON	ALL FIRMWARE RELEASES
SI2KRBN/L	130	GOLD RIBBON	ALL FIRMWARE RELEASES

**GENERAL CHARACTERISTICS**

PRINTABLE MATERIALS	SI2KPRINTUNO FEEDER OPTION
ABS	'STACK FEEDER' (for cable tags)
POLYCARBONATE	'SINGLE FEEDER' (for terminal block)
PVC	'NONE' (for PVC items)
METACRYLATE	'NONE' and 'ACRYLATE' for manual metacrylate items

**NOTES:**

Document Number	APPR. BY:	DATE:	REVISION OBJECT	PAGES:
78-8127-9039-8		09/01/08		1 of 1