

## EMG 45-LED 14S/24

Order No.: 2952334

The illustration shows version EMG 45-LED 14S/ 5




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2952334>

Indicator module, with 14 red LEDs and common return line, input voltage 24 V DC



### Commercial data

GTIN (EAN)	 4 017918 084431
sales group	H110
Pack	5 pcs.
Customs tariff	85318095
Catalog page information	Page 735 (IF-2011)

### Product notes

WEEE/RoHS-compliant since:  
05/10/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Input voltage	24 V DC
Current required per light indicator	Approx. 3 mA
Status display	14 LEDs
Width	45 mm

Height	75 mm
Depth	47.5 mm
Ambient temperature (operation)	-20 °C ... 45 °C
Ambient temperature (storage/transport)	-40 °C ... 60 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection method	Screw connection

#### Certificates / Approvals



Certification GOST

#### Accessories


Item	Designation	Description
2947035	EMG-GKS 12	Equipment marker, width 12 mm

#### Marking

## Diagrams/Drawings

### Circuit diagram

---

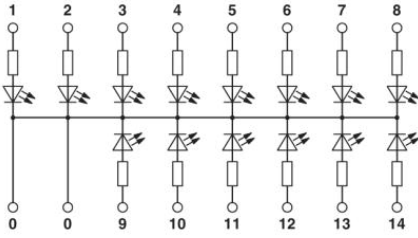

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;