

PI-EX-TB/T


Order No.: 2835927



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2835927>


Ex-basic terminal block, with knife disconnection and integrated temperature measurement of the input terminal blocks for cold point compensation



Commercial data	
GTIN (EAN)	 4 017918 911805
Note	Made-to-order
sales group	H780
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 467 (IF-2009)

Product notes

WEEE/RoHS-compliant since: 10/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Nominal voltage U_N	250 V
Nominal current I_N	4 A
Width	12.4 mm

Height	145 mm
Depth	86.5 mm
Housing insulation material	PBT
Inflammability class acc. to UL 94	V0
Color	gray
Conformance	CE-compliant
ATEX	Ex II (1) G [Ex ia] IIC Ex II (1) D [Ex iaD] Ex II 3 G Ex nA II T4 X
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Connection data

Connection method	Screw connection
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Screw thread	M3
Stripping length	12 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Screw thread	M3
Stripping length	12 mm
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Certificates / Approvals


Certification	GOST
Certification Ex:	KEMA-EX, PxC-EX

Accessories

Item	Designation	Description
Assembly		
2835969	PI-ATP	Separating plate, 2 mm thick, black, required at the start and end of a PI terminal strip where continuous bridges are used.
Bridges		
2966692	FBST 500-PLC BU	Continuous plug-in bridge, Length: 500 mm, Color: blue
2966838	FBST 500-PLC GY	Continuous plug-in bridge, Length: 500 mm, Color: gray
2966786	FBST 500-PLC RD	Continuous plug-in bridge, Length: 500 mm, Color: red
Marking		
0800284	ZBFM 6/WH,LGS:1-100	Zack strip, flat, 100-section, labeled horizontally with consecutive numbers from 1-100, for all terminal blocks, pitch 6.2 mm, color: white
0803621	ZBFM 6/WH,LGS:FORTL.ZAHLEN	Zack strip, flat, 100-section, labeled horizontally with consecutive numbers from 1-10, 11-20 etc. up to 91-100, 10 identically marked strips per flat Zack strip, for all terminal blocks, pitch 6.2 mm, color: white
0803618	ZBFM 6/WH:UNBEDRUCKT	Zack marker sheet, flat, unprinted: 100-section, 10 strips à 10 markers, sufficient for 100 terminal blocks, for all terminal blocks, pitch 6.2 mm, labeling with M-PEN or CMS system, color: white
0803650	ZBFM 6:SO/CMS	Special printing, Zack marker sheet, flat, 100-section, divisible, marking according to customer requirements
Plug/Adapter		
0201689	MPS-IH BU	Insulating sleeve, Color: blue
0201728	MPS-IH GY	Insulating sleeve, Color: gray
0201676	MPS-IH RD	Insulating sleeve, Color: red
Tools		
1205121	SZG 0,6X3,5 VDE	Screwdriver, bladed, graded, for test socket screws, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Diagrams/Drawings

Dimensioned drawing

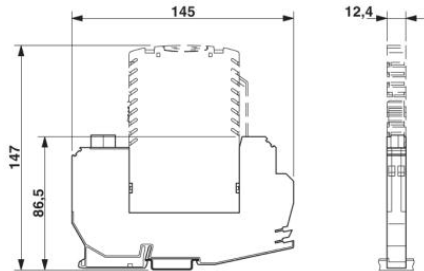

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;