
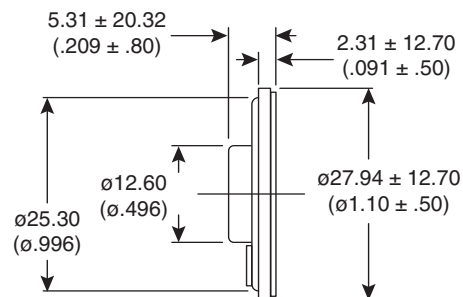




Part Number:

253-5011



Test conditions: 20°C, 65% R.H. Standard Response Zero Level: 40dB

S.P.L. average of 0.8, 1.0, 1.2, 1.5, 2.0, KHz

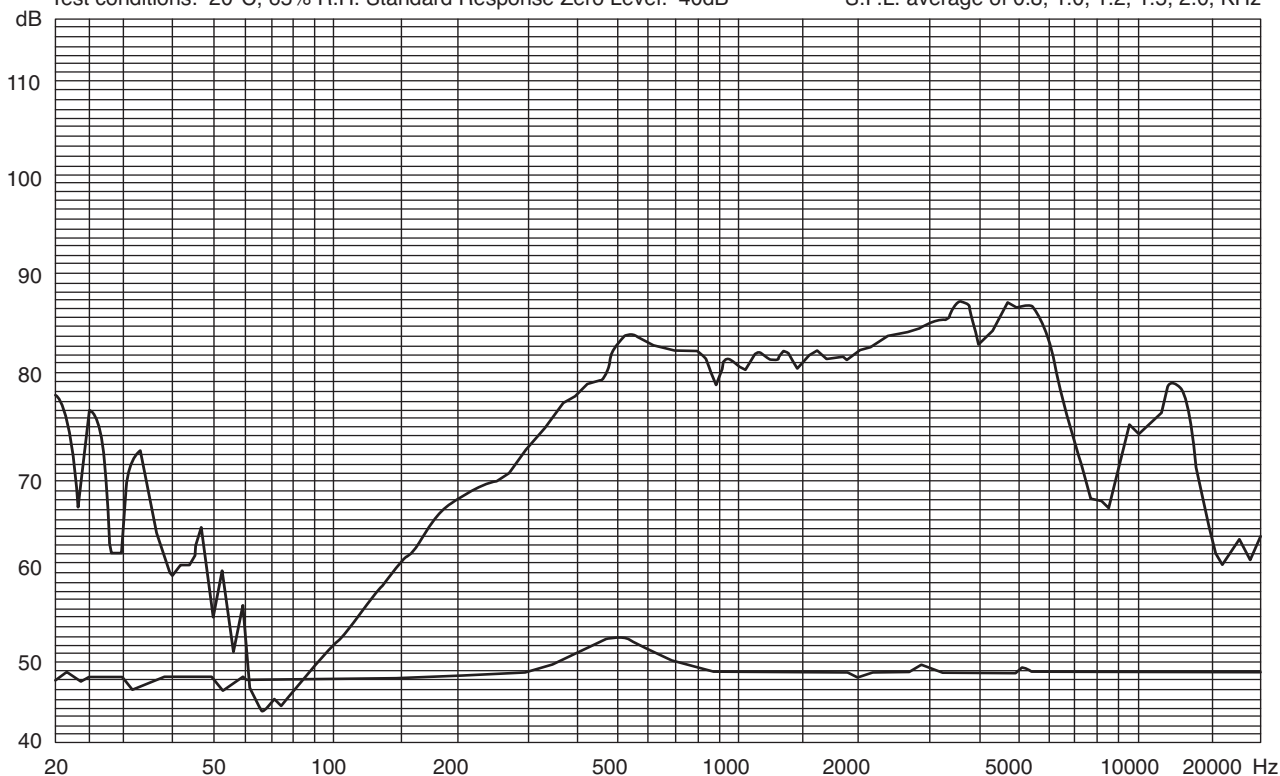

Speaker

KT-400213

Electrical specifications:

- Rated power: 0.1W
- Maximum power: 0.2W
- Impedance: $8\Omega \pm 1.2\Omega$
- Resonant frequency: $550\text{Hz} \pm 110\text{Hz}$
- Frequency response: 550Hz ~ 6000Hz