





MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
JS-558
M8805/55-008

FED. WFS. CODE 91929

2X $\varnothing 138-32$ UNC-2B THREAD
SELF LOCKING INSERT NUT

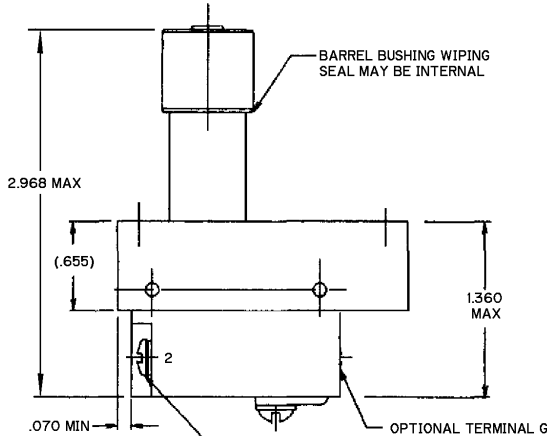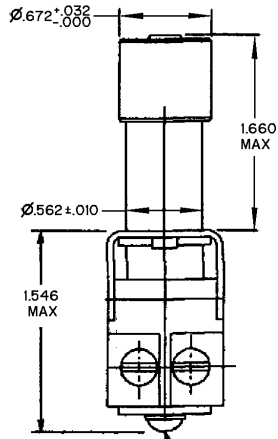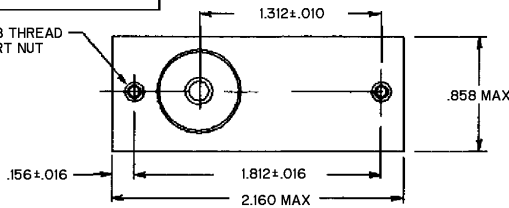

BARREL BUSHING WIPING
SEAL MAY BE INTERNAL

TERMINAL G
 $\varnothing 138-32$ UNC-2A
(*6-32 UNC-2A) .250 LONG
ROUND HEAD SCREW MS35338-98
LOCKWASHER OR EQUIVALENT

3X $\varnothing 125-40$ UNC-2A
(*5-40 UNC-2A) .250
LONG BINDING HEAD
SCREW (1 ADDITIONAL
G TERMINAL OPTIONAL)


CATALOG LISTING
 JS-558
 ISSUE 4
 M
 REVISIONS
 A 201207
 19 SEP 00
 B 0000318
 20 MAY 03
 C 0002787
 08 JAN 04
 CHECK SA V 7 OCT 99
 DRAWN JJA 7 OCT 99
 RASTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	
ACTUATING FORCE	7 - 11 LBS
FULL OVERTRAVEL FORCE	20 LBS MAX
RELEASE FORCE	5 LB MIN
PRETRAVEL	.090 MIN
DIFFERENTIAL TRAVEL	.050 MIN
OVERTRAVEL	.050 MIN
TOTAL TRAVEL	.165 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT D P S T - N O		
28 VDC		
	RATED LOAD	OVERLOAD
INDUCTIVE	.75	1.75

THIRD ANGLE PROJECTION	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.01) ± .030
TWO PLACE	(.001) ± .015
THREE PLACE	(.0001) ± .005
ANGLES	±
WEIGHT	.32 LB MAX



- NOTES**
- 1 - SWITCH SEALED PER MIL-PRF-8805, SYMBOL 3
 - 2 - TERMINAL HARDWARE PACKET FURNISHED UNASSEMBLED: 15PA308-JS INCLUDES BUSS BRACKET AND TERMINAL SCREWS
 - 3 - MICRO SWITCH, MANUFACTURER'S CAGE CODE, CATALOG LISTING, MILITARY PART NUMBER AND DATE CODE IDENTIFIED ON SIDE OF SWITCH
 - 4 - OPERATING TEMPERATURE RANGE: -40°C TO +85°C

ANSI Y14.5M-1982 APPLIES