

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH—BASIC

CATALOG LISTING

V3-3120

CK-X4134

REPLACES X98343-V3

RELEASE NO. PR-21180

CATALOG LISTING
V3-3120
PAGE 1 OF 1



M

ISSUE
2

CHECK

REVISIONS
A REL PR21180
DCS 9 JUN 94

CHECK

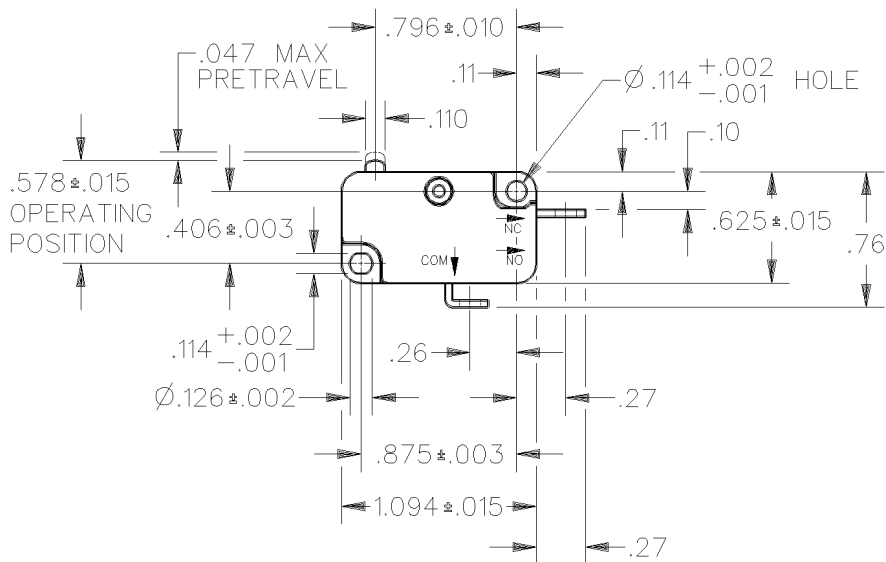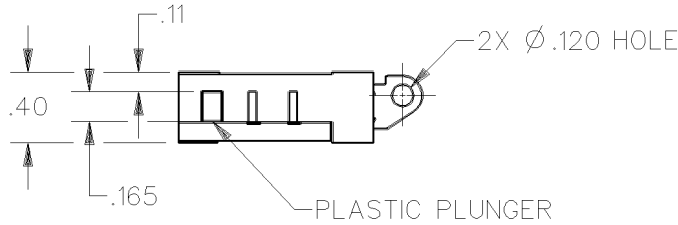


NOTE
1 - TERMINALS ARE SILVER PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
		<p>OPERATING FORCE --- 150 GRAMS MAX RELEASE FORCE --- 15 GRAMS MIN DIFFERENTIAL TRAVEL --- .002-.010 OVERTRAVEL --- .050 MIN FREE POSITION --- .625 MAX RELEASE TRAVEL --- .010 MIN</p>	
<p>L83 15.1A 1/2HP 125, 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"</p>		<p>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</p> <p>ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±</p>	
<p>WEIGHT .016 LB</p>			

DDM/CAD

DRAWN

DCS 9 MAY 94 CHECK