MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
BZ–R370–P5

REPLACES X102120–BZ
RELEASE NO. PR–23061
CATALOG LISTING BZ–R370–P5
ISSUE 1

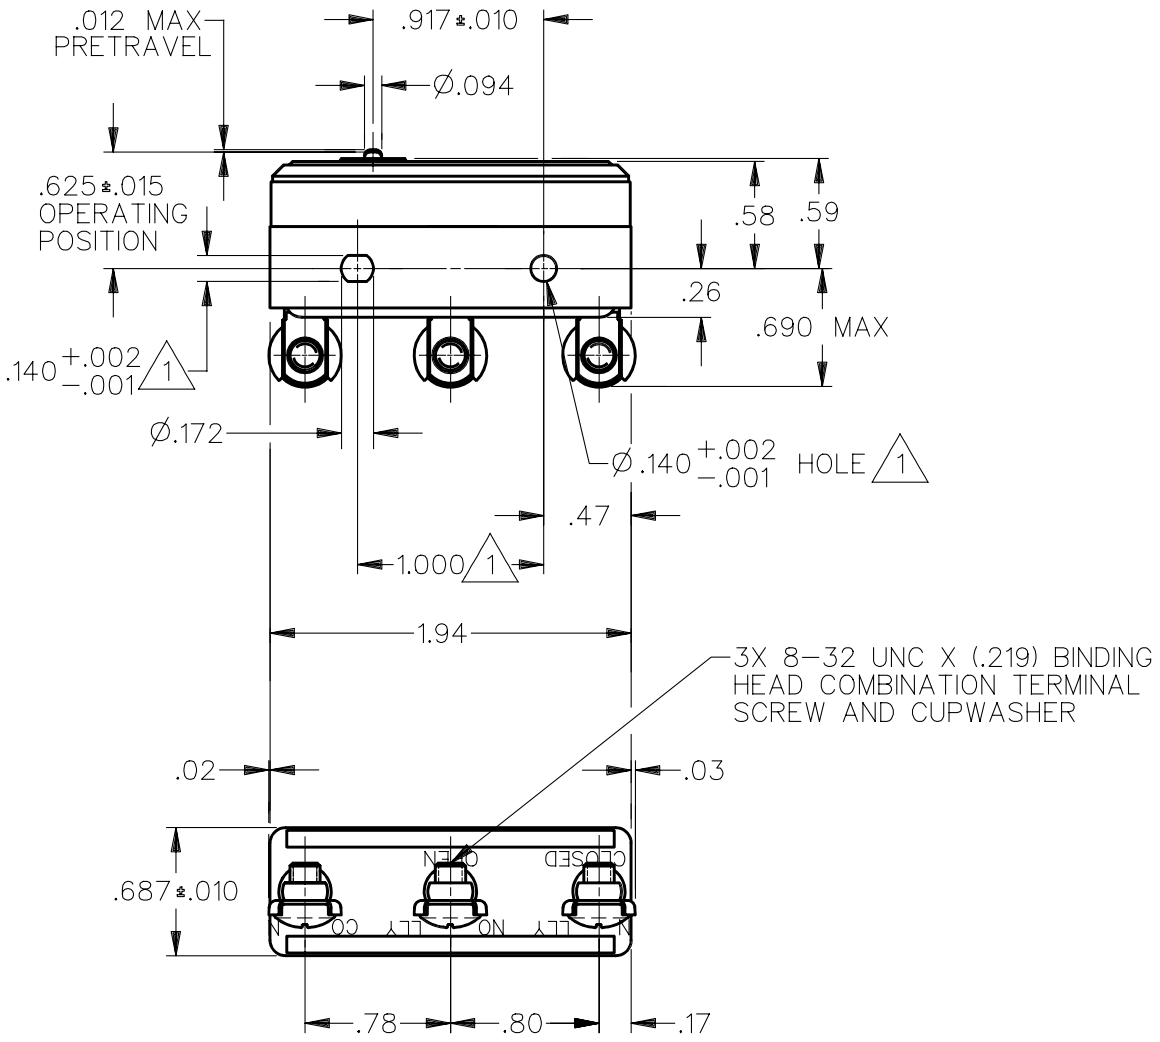

NOTES
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000±.002 CENTERS

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE – – – 7.2–10.2 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE – – – – – 4 OZ MIN	L103 15A 125, 250 OR 480 VAC 1/8HP 125, 1/4HP 250 VAC	ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL––.00015–.00060		TWO PLACE (.00) ±.015
OVERTRAVEL – – – – – – – .005 MIN		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT .060 LB

REVISIONS

	CHECK	CHECK	CHECK	CHECK
DDM/CAD	MAM 2 OCT 97	SAV 2 OCT 97		

Downloaded from Elcodis.com electronic components distributor