MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSQ310-20



CIRCUIT DIAGRAM

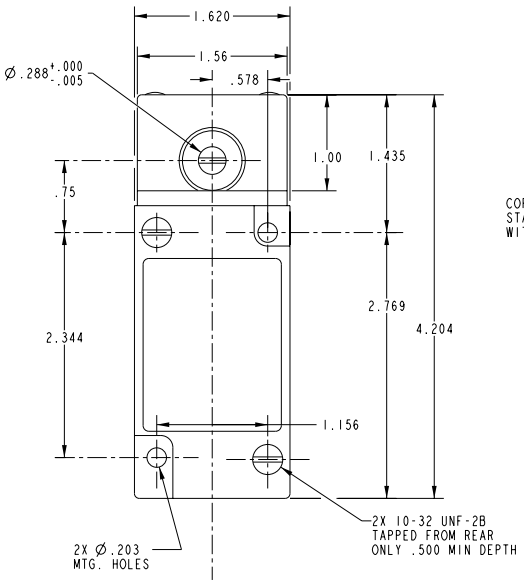

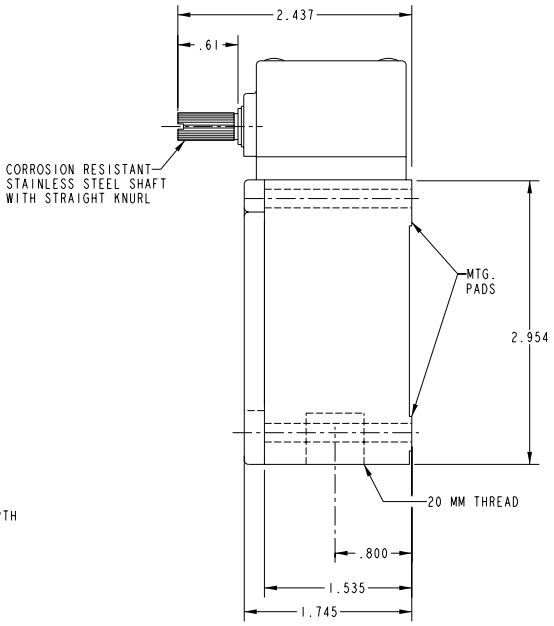

NOTES

1 - SWITCH USES FLUOROSILICONE SEALS IN OPERATING HEADS ONLY

CHARACTERISTICS	ELECTRICAL DATA
OPERATING TORQUE ---------- 4 IN LBS MAX	CONTACT ARRANGEMENT
PRETRAVEL ---------- 55°	SPDT
CONTACT TRANSFER ---------- 60°	
SEGMENT POSITION ---------- 90°	
TOTAL SHAFT ROTATION ---- 360° CW OR CCW	

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING LSQ310-20
PAGE 1 OF 1
ISSUE 1
REVISIONS
REPLACES
RELEASE NO. PR-22895
CHECK
CHECK
CHECK
CHECK
DRAWN GLH 11 SEP 97
PTC/CAD

Downloaded from Elcodis.com electronic components distributor