MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
DT-2RV3-B6

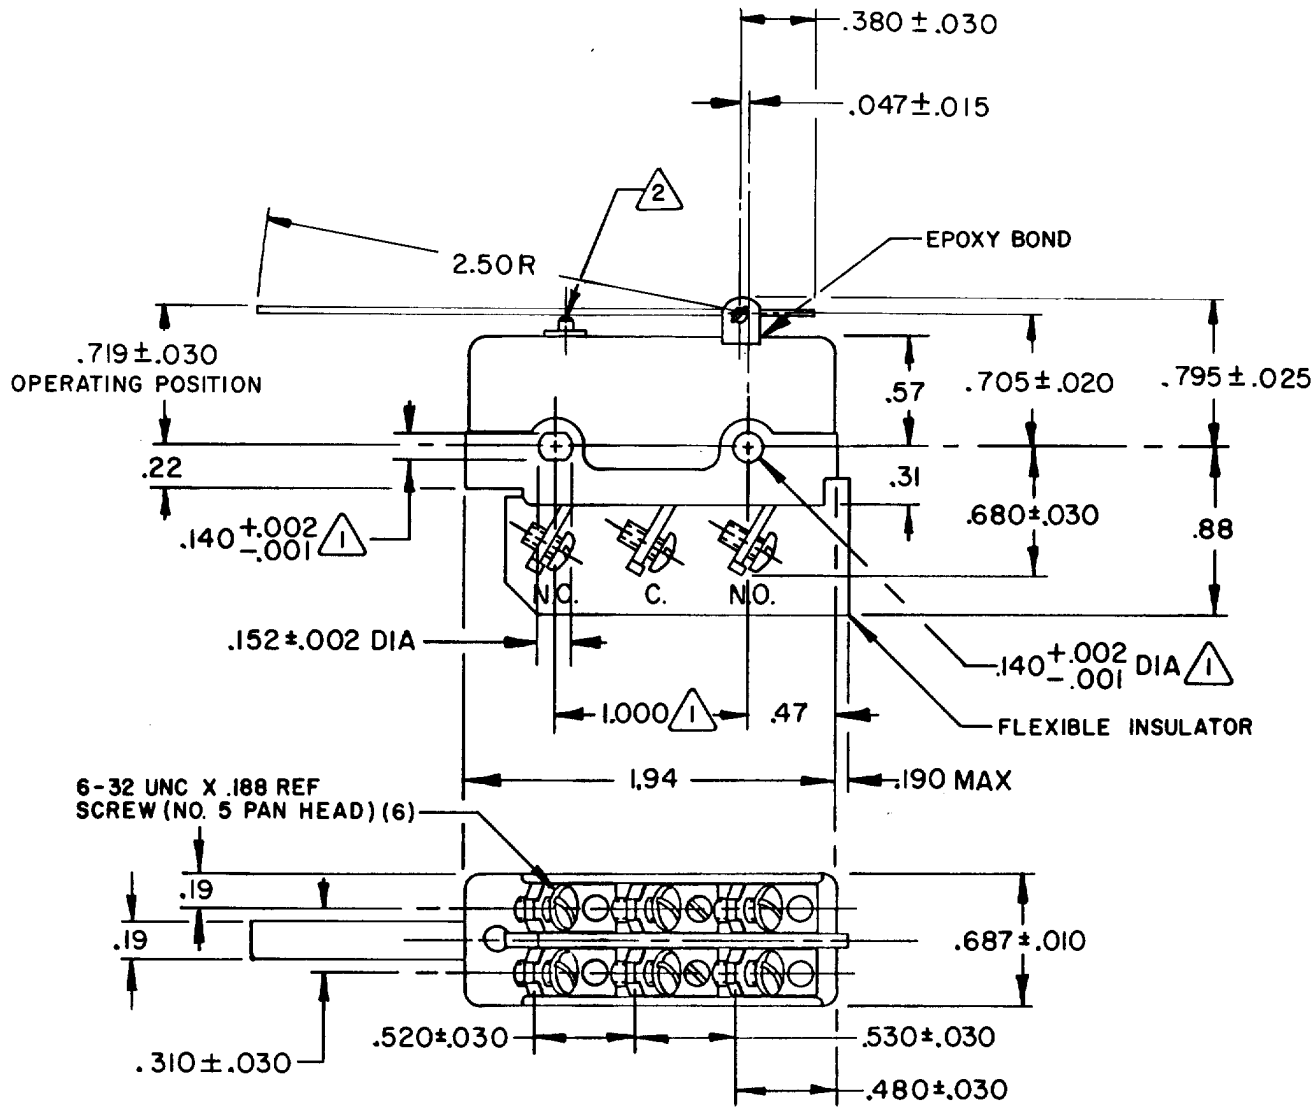

NOTE

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
2. OVERTRAVEL TO BE MEASURED AT CENTER LINE OF PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE — — — 4-7 OZ

RELEASE FORCE — — — 1/2 OZ MIN

DIFFERENTIAL TRAVEL — — — .115 – .190

OVERTRAVEL — — — 2 .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

UL LISTED-FILE E12252
CODE L59
10A-125 OR 250 VAC
0.3A-125 VDC; 0.15A-250 VDC

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS — SI METRIC ☐ — US CUSTOMARY ☒

WEIGHT .085 LB

DRAWN	B E N	2 JAN 75
CHECK	D J W	6 JAN 75
CHECK		
CHECK		

REVISIONS

A	C037528	C J H 31 AUG 76
B	C038280	K P K 31 MAR 77
C	C046028	WJM 13 JUN 79
D	C065429	J A P 4 APR 90

DRAWING NUMBER: M DT-2RV3-B6
RELEASE NO. PR-4620
REPLACES
ISSUE X 5

FO-52848-A

Downloaded from Elcodis.com electronic components distributor