FO-50360-L

CW-B9431

REV	DOCUMENT	CHANGED BY	CHECK
3	0013134	NM 13MAY05	AK

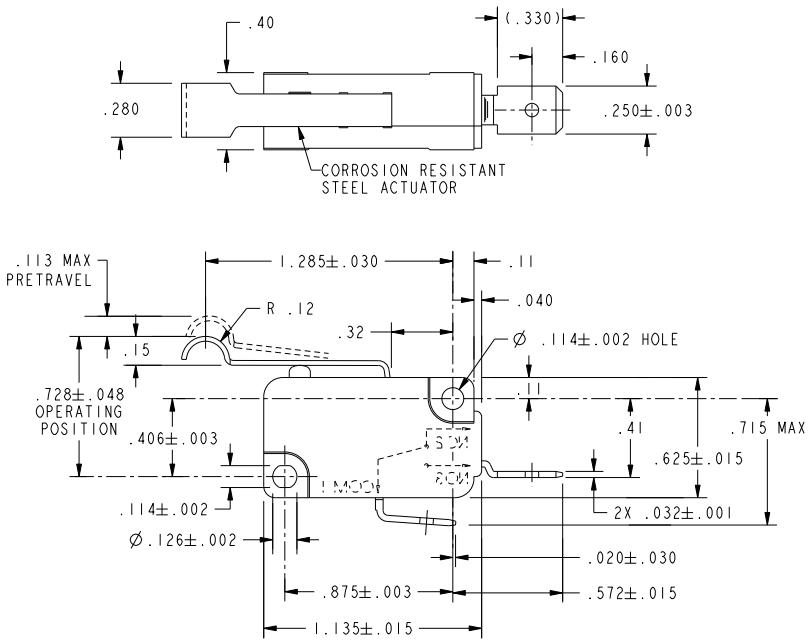

NOTES
1 - SILVER PLATED TERMINALS
2 - TESTED TO SHOW COMPLIANCE WITH UL 858 OVEN LATCH REQUIREMENTS UNDER THE FOLLOWING PARAMETERS: ELECTRICAL ENDURANCE FOR 100K OPERATIONS AT 200°C FOR 250 HOURS MINIMUM WHILE CONTROLLING AN INDUCTIVE LOAD OF 6A, 277VAC
3 - SWITCH MATERIALS WILL WITHSTAND 200°C

CHARACTERISTICS	
OPERATING FORCE	91 GRAMS MAX
RELEASE FORCE	9 GRAMS MIN
DIFFERENTIAL TRAVEL	.025 MAX
OVERTRAVEL	.064 MIN
RELEASE TRAVEL	.015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

L278
6A, 1/8HP 125, 250 OR 277 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] USC (inch) CUSTOMARY [ ] SI (mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	GJW	12APR05
CHECK	MDM	7MAY01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE: **SWITCH, BASIC**

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-1X2AE9-292	3

SCALE 2:1 | WEIGHT | SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor