


Dimensions: mm (In.)

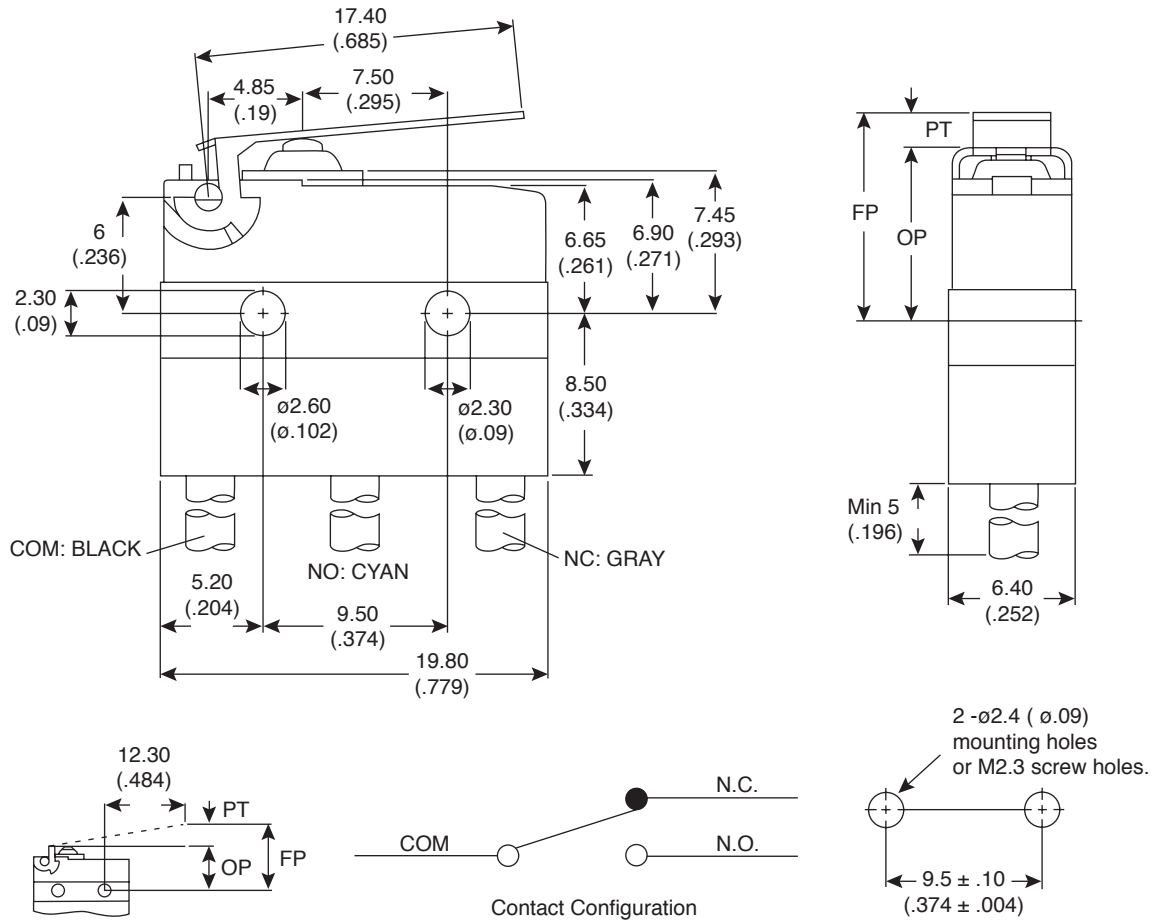

Mechanical Specifications:

- Operating Frequency: mechanical 120 operations/min
- Mechanical Life: 2,000,000 operation Min.

Electrical Specifications:

- Rating: 6A / 125VAC / 250VAC
- Operating Frequency: electrical 10~30 operations/min
- Electrical Life: 6,000~50,000 operations
- Contact Resistance: 100m Ω max.
- Insulation Resistance: 100m Ω min. at 500VDC
- Dielectric Strength: 1,000VAC RMS (50-60HZ)

Operating Characteristics:

- OF Max. (g): 70
- Op (mm): 8.8 \pm 1.6
- PT Max. (mm): 6.3
- OT Min. (mm): 1.6
- MD Max. (mm): 0.9
- FP Max. (mm): 13.5
- RF Max. (g): 14

Sealed Snap Switch
SNS71-06-070ST-W01



Available from Mouser Electronics

www.mouser.com

1-800-346-6873