

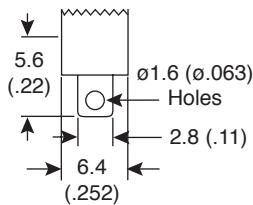




**DIMENSIONS: mm (In.)**

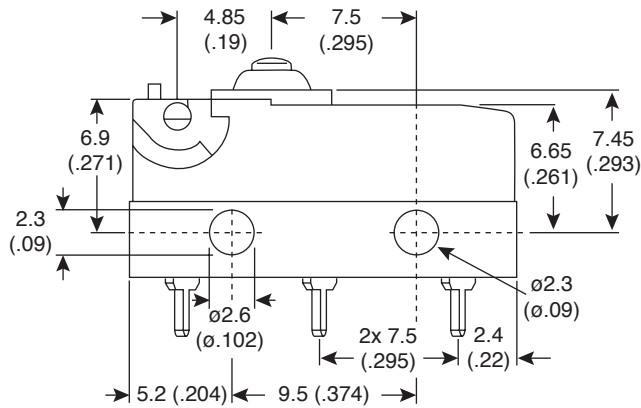


**Solder Terminals**



**Contact Configuration**



**Mounting Holes**

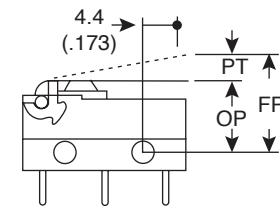

**Mechanical Specifications:**

- Operating Frequency: 120 operations per minute
- Life: 2,000,000 operation min.

**Electrical Specifications:**

- Operating Frequency: 10~30 operations per minute
- Life: 6,000~50,000 operations
- Rating: 6A/125VAC/250VAC
- Contact Resistance: 100m $\Omega$  max.
- Insulation Resistance: 100m $\Omega$  min. at 500VDC
- Dielectric Strength: 1,000VAC RMS (50-60HZ)

**Operating**

**Characteristics:**

- OF Max. (g): 203
- Op (mm): 8.4  $\pm$ 0.3
- PT Max. (mm): 1.2
- OT Min. (mm): 0.6
- MD Max. (mm): 0.2
- FP Max. (mm): 9.3
- RF Max. (g): 50
- Terminal Width: 0.5mm

Sealed Snap Switch  
SNS72-06-082ST-S01



Available from Mouser Electronics

www.mouser.com

1-800-346-6873