

2CPSA2A1B



2CPS Series, Cable Pull Safety Switch, Cable, Maintained Both Sides, 2NC/2NO Direct Opening (Switch 2, Left: 1NC/1NO; Switch 2, Right: 1NC/1NO), 1/2 NPT, Gold-plated Contacts, 120 Vac Multi-cluster LED

Actual product appearance may vary.

Features

- Positive opening operation of normally closed contacts
- Choice of 2NC/2NO or 3NC/1NO contact configurations
- Maximum cable length in a single direction is 76 m (250 ft) for a combined length of 152 m (500 ft) in dual directions
- Choice of three actuator configurations
- Removable contact block version available
- Large wiring cavity with straight-through wiring
- 24 Vdc or 120 Vac bright, multi-cluster LED status indicator light available
- Gold-plated contacts are standard
- Die-cast zinc housing
- Optional hardware packs available

Potential Applications

- Long conveyor systems found in warehouses and distribution centers
- Conveyor systems having a high amount of vibration
- Conveyor systems that experience wide temperature swings
- Long conveyor systems where easy through wiring, or highly visible trip status is required
- Perimeter guarding where hosedown conditions are present

Description

The 2CPS Cable Pull Safety Switch provides readily accessible emergency stop over a long, linear distance. It is a cost-effective means of providing this emergency stop signal compared to multiple emergency stop push buttons. (Cable Pull Safety Switches are not, however, to be used as a means of personnel safeguarding. They may be used to prevent further injury or damage to equipment when used for emergency stop signaling.)

The 2CPS Series Cable Pull Safety Switch is designed to provide emergency stop protection for exposed conveyor lines. The internal mechanism latches on both slackened cable (push) and pulled cable. This capability enhances productivity by eliminating nuisance stops due to variations in temperature, stretch of cable over time, and other application variables.


A line in the midpoint of the cable tension window indicates proper cable tension, providing easy and intuitive set-up. The direct acting switch contacts are held closed when the actuating cable is under proper tension and the reset knob is set to RUN. When the actuating cable is pulled, slackened or broken, a cam positively opens the NC (Normally Closed) switch contacts. The snap action, trip operation causes the switch contacts to change state and mechanically latch almost simultaneously when the cable is pulled, slackened or broken. The NC switch contacts remain open until the 2CPS is reset by properly tensioning the cable and

manually rotating the reset knob.

When the direct acting switch contacts open, the auxiliary contacts also actuate (open contacts close and closed contacts open). The auxiliary contacts are electrically isolated from the direct acting switch contacts. These NO (Normally Open) contacts may be used for monitoring or signaling.

The 2CPS complies with: Low Voltage Directive 73/23/EEC, as amended by directive 93/68/EEC; Machinery Directive 98/37/EEC only as the directives relate to the components being used in a safety function; IEC/EN60947-1; IEC/EN60947-5-1; IEC/EN60947-5-5.

Product Specifications	
Product Type	Cable Pull Safety Switch
Actuator	Cable, Maintained Both Sides
Switch Type	2NC/2NO Direct Opening (Switch 1, Left: 1NC/1NO; Switch 2, Right: 1NC/1NO)
Contact Material	Gold-plated
Termination Type	1/2 NPT
Ampere Rating	10 uA to 50 mA Low Energy
Voltage	250 Vac and 60 Vdc Maximum
Housing Material	Zinc Die-Cast
Series Name	2CPS
Shock	15 G
Vibration	10 Hz - 500 Hz, 5 G
Sealing	IP67, NEMA/UL 1, 4, 12, 13
Approvals	UL, CSA, CE
CSA File #	LR57326
UL File #	E37138, E157416
Agency Approvals and Standards	EN60947-1, EN-60947-5-1, EN60947-5-5
Mechanical Life	1 Million
Operating Temperature Range	-40 °C to 85 °C [-40 °F to 185 °F]
Availability	Global
UNSPSC Code	302119
UNSPSC Commodity	302119 Switches and controls and relays
Contact Block	Removable with Heavy Duty Wiring Receptacles
Indicator	120 Vac Red Multi-cluster LED
Note 1	Low Voltage Directive 73/23/EEC, as amended by directive 93/68/EEC. Machinery Directive 98/37/EEC only as the directives relate to the components being used in a safety function.

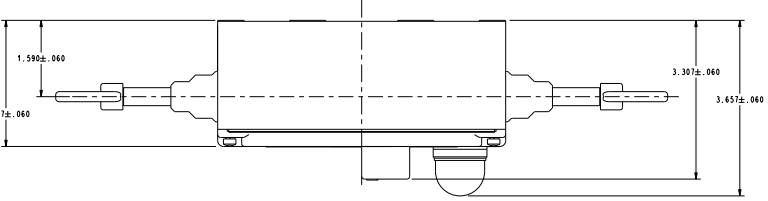

2CPS

BODY CODE

A	1/2" NPT
B	PG13.5
C	26mm
D	FF 1/2

CONTACT BLOCK MOUNTING CODE

1	STANDARD, CONTACT BLOCKS MOUNTED TO HOUSING
2	REMOVABLE CONTACT BLOCKS W/RECEPTACLES

BASIC SWITCH CODE



A	2NO - 2NC DIRECT ACTING (SWITCH 1: 1NO - 1NC) (SWITCH 2: 1NO - 1NC)
B	1NO - 3NC DIRECT ACTING (SWITCH 1: 1NO - 1NC) (SWITCH 2: 2NC)
D	4NC DIRECT ACTING (SWITCH 1: 2NC) (SWITCH 2: 2NC)

ACTION CODE


1	MAINTAINED BOTH SIDES
2	MAINTAINED LEFT SIDE, NO ACTION RIGHT SIDE
3	MAINTAINED RIGHT SIDE, NO ACTION LEFT SIDE

INDICATOR-PILOT LIGHT CODE

A	24V LED CLUSTER
B	120V LED CLUSTER

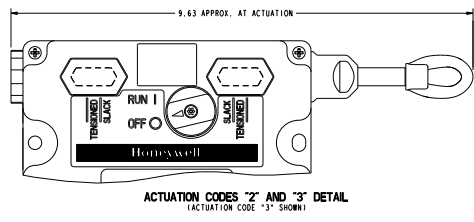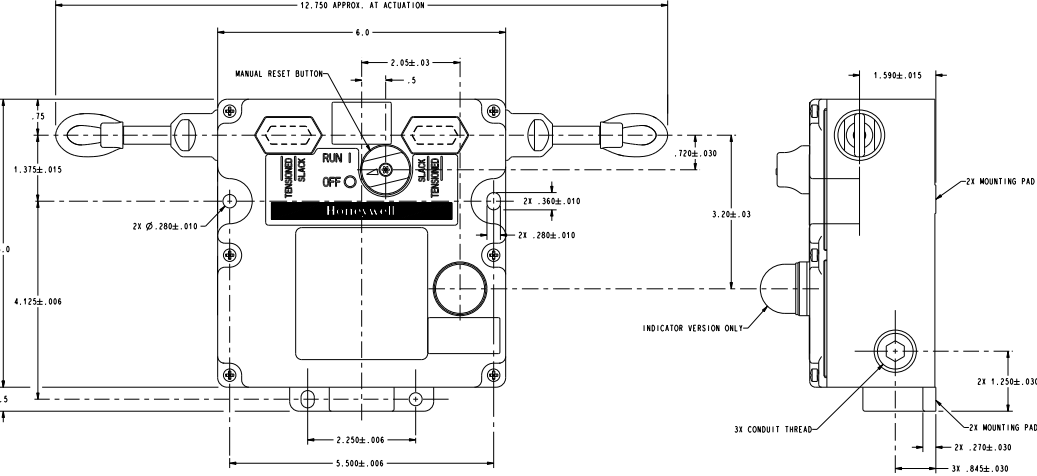

- NOTES**
- HARDWARE PACKET CONSISTING OF TWO CONDUIT THREAD PLUS AND ONE "J" HOOD TURNBUCKLE FOR EACH ACTUATOR IS INCLUDED WITH PRODUCT.
 - NOMENCLATURE IS PROVIDED FOR IDENTIFICATION OF EXISTING LISTINGS. NOT ALL COMBINATIONS ARE POSSIBLE.
 - POSITIVE OPENING TO IEC/EN60947-5-1
 - FORCE TO MAINTAIN ACTUATION SHAFT AT PROPER TENSION: 25 LBS ACTUATION SHAFT OPERATE FORCE: 40 LBS

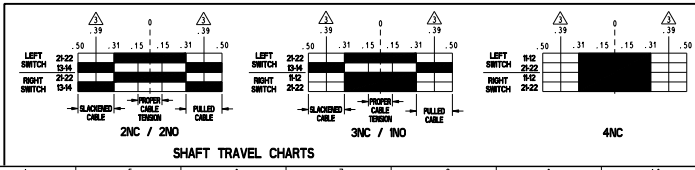

ELECTRICAL RATING		ENVIRONMENTAL		APPROVALS
AC		DC		TEMP. RANGE: -40°C TO 85°C -40°F TO 185°F
A300	AC15	G300	DC13	STORAGE: -40°C TO 85°C -40°F TO 185°F
U _e	I _e	U _e	I _e	SHOCK: 15G PER IEC 68-2-27
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)	VIBRATION: 5G PER IEC 68-2-4
150	6	24	2.55	
240	3	250	.27	
IEN = 10A		IEN = 10A		
NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	
1	040	31	040	
2	015	30	15	
3	005	0	0	
4	005	0	0	
THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		
FIN. PL.:	0.040	FIN. PL.:	0.040	
DR. PL.:	0.100	DR. PL.:	0.100	
ANGLES:	0.005	ANGLES:	0.005	
DIP MATERIAL-COMMERCIAL STANDARD		DIP MATERIAL-COMMERCIAL STANDARD		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
DRAWING NO. 2CPS SERIES CHART 1		DRAWING NO. 2CPS SERIES CHART 1		
REV. 20		REV. 20		

Honeywell

SWITCH ASSEMBLY

SCALE: FULL WEIGHT