

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		AL2		REVISED PER ECO-11-004820	11MAR11	RK	HMR






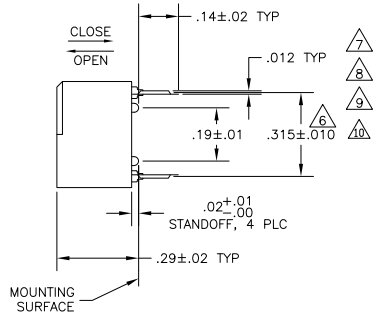


FIG 1



CONTACT ARRANGEMENT

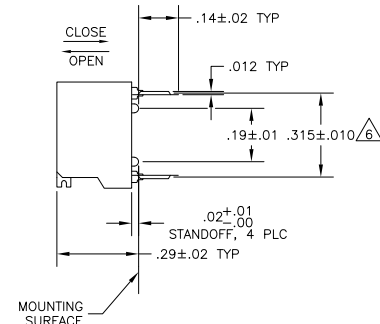


FIG 2

- △ NO POSITION MARKING.
- △ NO PART NO. MARKING.
- △ STRIPPABLE TAPE SEAL, SEE FIGURE 6.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 1 FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- 2 SWITCH SHOWN IN OPEN POSITION.
- 3 ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- 4 STAMPING WILL VARY ON 2 AND 3 POSITION TOPS DUE TO SPACE RESTRICTIONS.
- △ STRIPPABLE TRANSPARENT SEAL, SEE FIG 6.
- △ .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300±.010 AT MOUNTING SURFACE.

FIG 2	FIG 3A& 7	FIG 3B	FIG 4	FIG 3A& 5	FIG 3A	FIG 3B	FIG 3A	FIG 3A
SUPSD BY 1-435802-6	FIG 2	△ 9	△ 5	△ 5	1.08	10	6-435802-3	
△ OBSOLETE	FIG 2	△ 8	△ 5	△ 5	.88	8	3-435802-8	
SUPSD BY 2-5435802-9	FIG 2	△ 8	△ 5	△ 5	.58	5	3-435802-1	
SUPSD BY 1-435802-0	FIG 1	△ 8	△ 5	△ 5	.88	8	3-435802-0	
OBSOLETE	FIG 1	△ 7	△ 5	△ 5	.48	4	2-435802-9	
OBSOLETE	FIG 2	△ 7	△ 5	△ 5	.28	2	2-435802-8	
OBSOLETE	FIG 2	△ 7	△ 5	△ 5	.28	2	2-435802-7	
OBSOLETE	FIG 2	△ 7	△ 5	△ 5	1.08	10	2-435802-6	
OBSOLETE	FIG 2	△ 7	△ 5	△ 5	.88	8	2-435802-5	
OBSOLETE	FIG 2	△ 7	△ 5	△ 5	.88	8	2-435802-4	
OBSOLETE	FIG 2	△ 7	△ 5	△ 5	.48	4	2-435802-3	
	FIG 2				1.28	12	2-435802-2	
	FIG 2				1.18	11	2-435802-1	
	FIG 2				1.08	10	2-435802-0	
	FIG 2				.98	9	1-435802-9	
	FIG 2				.78	7	1-435802-8	
	FIG 2				.68	6	1-435802-7	
	FIG 2				.58	5	1-435802-6	
	FIG 2				.48	4	1-435802-5	
SUPSD BY 435802-2	FIG 2				.38	3	1-435802-4	
SUPSD BY 3-1437590-2	FIG 1				.28	2	1-435802-3	
△ OBSOLETE	FIG 2				1.28	12	1-435802-2	
	FIG 1				.28	2	1-435802-0	
	FIG 2				.88	8	435802-9	
	FIG 2				1.08	10	435802-8	
SUPSD BY 5435802-7	FIG 2				.98	9	435802-7	
	FIG 2				.78	7	435802-6	
	FIG 2				.68	6	435802-5	
	FIG 2				.58	5	435802-4	
	FIG 2				.48	4	435802-3	
	FIG 2				.38	3	435802-2	
	FIG 2				.88	8	435802-1	
435802-1 SHOWN								
	HOUSING MARKING							
	PROTECTIVE SEAL				A	NO OF POSN		
								PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	OTHER DIMENSIONS: MILLIMETERS	BY: R. TALLEY 9-19-89	DATE: 9-19-89
0 PLC ± .005	1 PLC ± .005	2 PLC ± .005	3 PLC ± .005
4 PLC ± .005	ANGLES ± .005		
MATERIAL: HOUSING & ROCKERS: POLYESTER	CONTACTS: BERYLLIUM COPPER	FINISH: CONTACTS PLATED .00030 MIN GOLD BY CONTACT AREA OVER .000500 MIN NICKEL	
APPROVED: J. MILLER 9-19-89	DATE: 9-19-89	NAME: J. MILLER	
APPLICATION SPEC: —	PRODUCT SPEC: —	SIZE: A2	CAGE CODE: 00779
RESTRICTED TO: —	DRAWING NO: C=435802	SCALE: 4:1	SHEET: 1 of 2
CUSTOMER DRAWING	REV: AL2		

TE Connectivity  
SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	MIN
AD	00	SEE SHEET 1	-	-




FIG 3A




FIG 3B




FIG 4






FIG 5



PROTECTIVE SEAL  
FIG 6



PROTECTIVE SEAL




FIG 7




FIG 8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: R. TALLEY 9-19-89		TE Connectivity	
		CR: R. MILLER 9-19-89		SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED	
DIMENSIONS:		APR: R. MILLER 9-19-89	NAME		
INCHES:		DRAWING LETTER		SIZE	
0 PLC		PRODUCT SPEC		CASE CODE	
1 PLC		APPLICATION SPEC		DRAWING NO	
2 PLC		WEIGHT		A2 00779	
3 PLC		FINISH		C-435802	
4 PLC		MATERIAL		RESTRICTED TO	
SEE SHEET 1		CUSTOMER DRAWING		-	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		SCALE		SHEET	
0.005		4:1		2 of 2	
ANGLES		REV		AL2	
FINISH					