

## AMS-39 SERIES STANDARD SURFACE MOUNT CONTACT





- UL and ULC Listed
- 3/4" operating gap
- Spacers and covers included
- Available in white, brown, gray, or ivory\*

### Application

The AMS-39 Series Standard Surface Mount Contact is a UL listed contact designed to protect a wide variety of openings such as: man doors, sliding doors, windows, cabinets, hatches, and many others.

### Dimensions

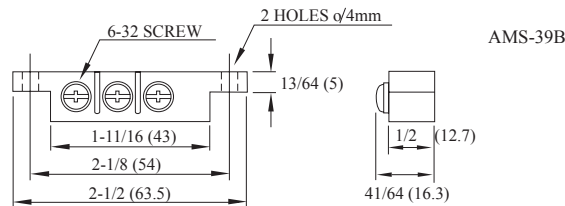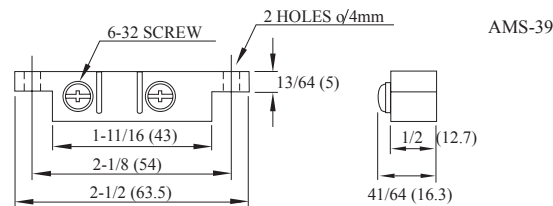

### Specifications

Model	Color	Stock Number	Contact	Contact Rating	Contact Type	Max. Carry Current	Max. Switching Current	Breakdown Voltage	Operating Gap	Mounting Method	Operating Temperature Range
AMS-39	White	4350190	Terminal	10VA	Form A N.O.	1.0 Amp	.4 Amp	200VDC	3/4"	Screw	32°F to 120°F (0°C to 49°C)
	Brown	4350187									
	Gray	4350188									
	Ivory	4350189									
AMS-39B	White	4350204		3VA	Form C N.O./N.C.	.5 Amp	.2 Amp	150VDC			
	Brown	4350202									
	Ivory	4350078									
AMS-39CVS (includes screws, covers, and spacers) 5 sets per pack	White	4350186		10VA	Form A N.O.	1.0 Amp	.4 Amp	200VDC			
	Brown	4350184									
	Gray	4350067									
	Ivory	4350185									

\* AMS-39B not available in gray