MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY- PUSHBUTTON SWITCH

CATALOG LISTING
3PB326-T S

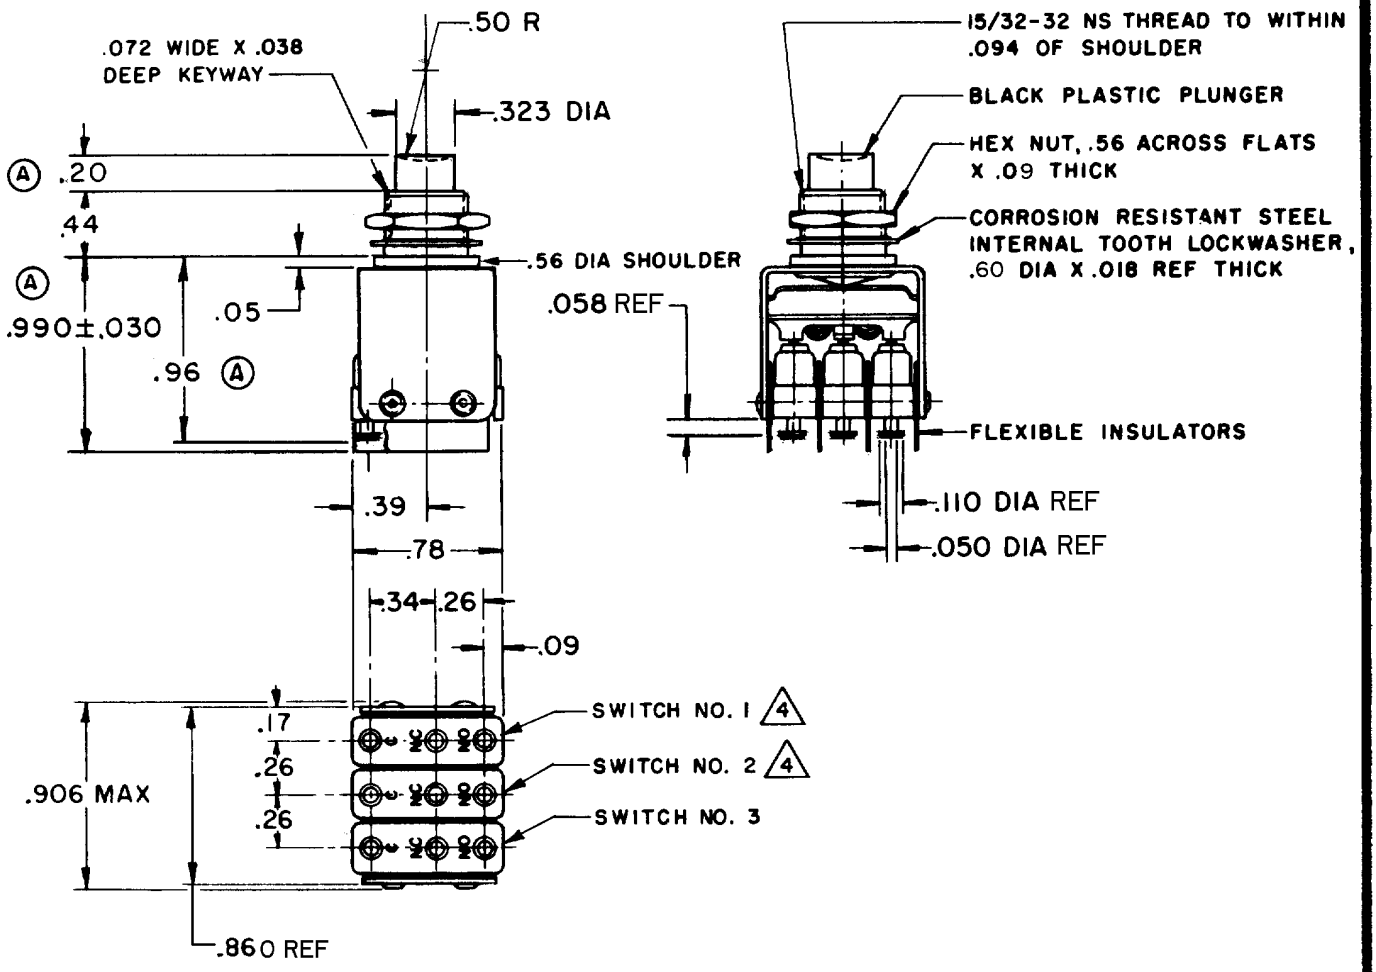

NOTES
1 - UNIT INCLUDES CAT. LIST. "11SM" TYPE BASIC SWITCH (3)
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
4 - BASIC SWITCH HAS 24K SOLID GOLD CONTACTS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — 35 OZ APPROX
TOTAL TRAVEL — — — — .100 APPROX

SWITCH NO. 1 AND 2

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	1/2 AMP
	50,000 FT	1/2 AMP
RESISTIVE	SEA LEVEL	1 AMP
	50,000 FT	1 AMP
MAXIMUM INRUSH		2 AMP

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (3)

SWITCH NO. 3

250 VAC — — — — — — — — — — — 5 AMP

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ISSUE	DRAWING NUMBER	RELEASE NO.	REPLACES
6	M 3PB326-T PAGE 1 OF 1	SR12211	

REVISIONS					
A	CO19800	M B F 14 JAN 65			
B	SR12211	RLD 14 MAR 66			
C	OBS CO74434	LJF 29 APR 93			
D	RE-INST PR20855	TSM 21 OCT 93			
E	CO-93593	PPF 27 OCT 98			

DRAWN	CHECK	DAW	CHECK	BRT	CHECK	JAF	CHECK
M B F	3 MARCH 64	5 MAR '64		5 MAR '64		27 OCT 98	

FO-50378

Downloaded from Elcodis.com electronic components distributor