

TG/LTG-Series Rocker Switches

TG/LTG-Series Rocker Switches



The TG-Series Mini Tippette rocker switches are single or double pole and feature an all nylon double-insulated construction. These switches are designed with snap-in mounting for fast, low cost assembly. The illuminated version (LTG) is available with either a paddle or rocker actuator. These AC rated switches are also suitable for low-voltage DC applications in a wide range of markets including Appliance, HVAC, Food service, and Transportation.


Dielectric Strength UL/CSA: 1000V - live to dead metal parts **Electrical Life** 50,000 cycles- maintained

25,000 cycles- momentary

Mechanical Life 100,000 cycles

Operating Temperature

32°F to 150°F (0°C to +65.6°C)

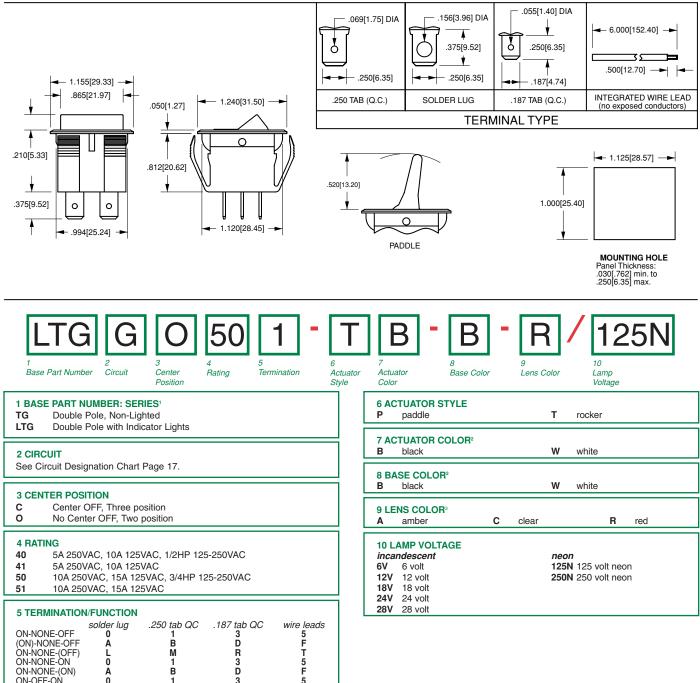

NOTES

14

ON-OFF-ON

Imprinting is available. Consult factory

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

5

TG available with circuits A, B, C, D, E, F ; LTG available with circuits G, H, I, J, M, N, P, Q, R, T, U, V, Y, Z. See page 17.

3

1

Custom colors are available. Consult factory. 2

3 Specify lens color for LTG-Series only

() Indicates momentary function.

www.carlingtech.com