




Dimensions: mm (In.)






Terminal



.187" SQ

4P DPST
(Illuminated)
125VAC 33K

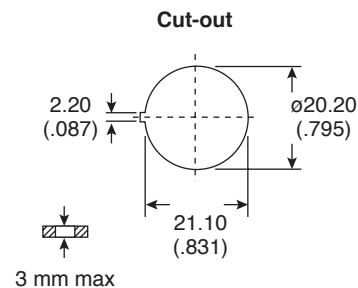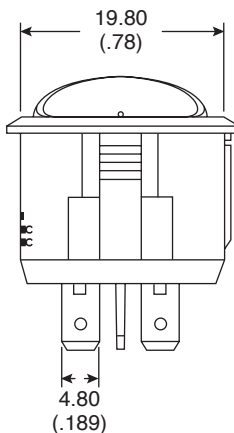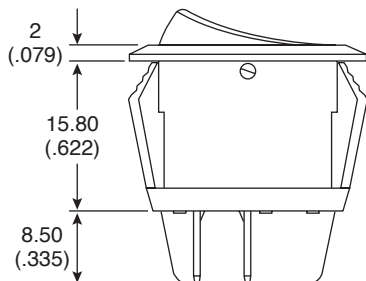

Electrical Specifications:

- Rating: 16A/125VAC, 10A/250VAC
- Contact resistance: 50mΩ max.
- Insulation resistance: 500VDC 100MΩ min.
- Dielectric strength: 1500VDC for 1 min.

Materials:

- Frames: Nylon (UL flame: 94V-2).
- Terminals: silver plated brass.
- Illuminated actuators are molded in PC.
- Snap-in mounting, easy to install switch into panel.

Illuminated Rocker Switch
103-R13-244B-02G

