

4.5 TO 24 VDC UNIPOLAR DEVICE

OPERATING CHARACTERISTICS

GAUSS	
OPERATE MAX	495
RELEASE MIN	200
DIFF MIN	35


ABSOLUTE MAXIMUM RATINGS

SUPPLY VOLTAGE (V <sub>S</sub> )/Ø	-1.0 VDC TO +25.0 VDC
VOLTAGE EXTERNALLY APPLIED TO OUTPUT	+25 VOLTS DC MAX WITH SWITCH IN "OFF" CONDITION ONLY -0.5 VOLTS MAX WITH SWITCH IN "OFF" OR "ON" CONDITION
OUTPUT CURRENT	40 mA (SINK PER OUTPUT)
TEMPERATURE	-40° C TO 100° C
OPERATE AND STORAGE	
MAGNETIC FLUX	NO LIMIT. THE CIRCUIT CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE

ELECTRICAL CHARACTERISTICS

	MIN	TYP	MAX	REMARKS
SUPPLY CURRENT			10.0 mA	ON CONDITION
OUTPUT VOLTAGE (OPERATED)			0.4 V	SINKING 20 mA PER OUTPUT
OUTPUT LEAKAGE CURRENT (RELEASED)			20µ A	LEAKAGE INTO SWITCH OUTPUT
OUTPUT SWITCHING TIME (SINKING 20 mA)				
RISE TIME			1.5µ SEC	10% TO 90%
FALL TIME			0.5µ SEC	90% TO 10%

NOTE: THIS DEVICE IS NOT PROTECTED AGAINST HIGH ELECTRICAL NOISE. IF ERRATIC OPERATION OCCURS AFTER INSTALLATION, INSTALL A CAPACITOR ACROSS THE INPUT TERMINALS (0.1 MFD). IF ERRATIC OPERATION CONTINUES, YOU MAY HAVE TO USE THE INDUSTRIAL DEVICES THAT MICRO SWITCH MANUFACTURES. PLEASE CONTACT YOUR LOCAL FIELD REPRESENTATIVE FOR INFORMATION.

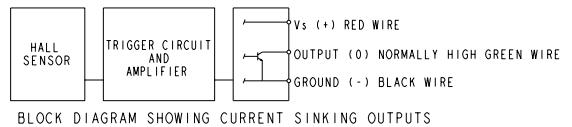

- NOTES
- ▲ FLUX ENTERING THE SOUTH POLE OF THE MAGNET WILL OPERATE THE SENSOR WHEN MAGNET IS POSITIONED AS SHOWN IN FIGURE 2. THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET
  - ▲ LEADWIRES (INDIVIDUAL WIRES) ARE 24 GAGE STRANDED WITH IRRADIATED POLYETHYLENE INSULATION
  - ▲ DATE CODE LOCATED IN THIS AREA
  - ▲ FROM -40° C TO 100° C AND 4.5 TO 24 VOLTS
  - ▲ CATALOG LISTING LOCATED IN THIS AREA
  - ▲ SENSITIVE AREA IS LOCATED .050 BEHIND THE SENSING FACE
  - ▲ AT 24 ± 2° C
  - ▲ V<sub>S</sub> IS THE UNREGULATED SUPPLY VOLTAGE



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

**MAGNETICALLY OPERATED CYLINDRICAL HALL SWITCH**

CATALOG LISTING  
**103SR13A-6**

THIRD ANGLE PROJECTION	
SCALE 3 : 1	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE (.01) ± .030	
TWO PLACES (.001) ± .015	
THREE PLACES (.0001) ± .005	
ANGLES	±
WEIGHT	±

ANSI Y14.5M-1982 APPLIES

FED. MFG. CODE 91229

103SR13A-6  
REV. 01  
REV. 02  
REV. 03  
REV. 04  
REV. 05  
REV. 06  
REV. 07  
REV. 08  
REV. 09  
REV. 10  
REV. 11  
REV. 12  
REV. 13  
REV. 14  
REV. 15  
REV. 16  
REV. 17  
REV. 18  
REV. 19  
REV. 20  
REV. 21  
REV. 22  
REV. 23  
REV. 24  
REV. 25  
REV. 26  
REV. 27  
REV. 28  
REV. 29  
REV. 30  
REV. 31  
REV. 32  
REV. 33  
REV. 34  
REV. 35  
REV. 36  
REV. 37  
REV. 38  
REV. 39  
REV. 40  
REV. 41  
REV. 42  
REV. 43  
REV. 44  
REV. 45  
REV. 46  
REV. 47  
REV. 48  
REV. 49  
REV. 50  
REV. 51  
REV. 52  
REV. 53  
REV. 54  
REV. 55  
REV. 56  
REV. 57  
REV. 58  
REV. 59  
REV. 60  
REV. 61  
REV. 62  
REV. 63  
REV. 64  
REV. 65  
REV. 66  
REV. 67  
REV. 68  
REV. 69  
REV. 70  
REV. 71  
REV. 72  
REV. 73  
REV. 74  
REV. 75  
REV. 76  
REV. 77  
REV. 78  
REV. 79  
REV. 80  
REV. 81  
REV. 82  
REV. 83  
REV. 84  
REV. 85  
REV. 86  
REV. 87  
REV. 88  
REV. 89  
REV. 90  
REV. 91  
REV. 92  
REV. 93  
REV. 94  
REV. 95  
REV. 96  
REV. 97  
REV. 98  
REV. 99  
REV. 100  
REV. 101  
REV. 102  
REV. 103  
REV. 104  
REV. 105  
REV. 106  
REV. 107  
REV. 108  
REV. 109  
REV. 110  
REV. 111  
REV. 112  
REV. 113  
REV. 114  
REV. 115  
REV. 116  
REV. 117  
REV. 118  
REV. 119  
REV. 120  
REV. 121  
REV. 122  
REV. 123  
REV. 124  
REV. 125  
REV. 126  
REV. 127  
REV. 128  
REV. 129  
REV. 130  
REV. 131  
REV. 132  
REV. 133  
REV. 134  
REV. 135  
REV. 136  
REV. 137  
REV. 138  
REV. 139  
REV. 140  
REV. 141  
REV. 142  
REV. 143  
REV. 144  
REV. 145  
REV. 146  
REV. 147  
REV. 148  
REV. 149  
REV. 150  
REV. 151  
REV. 152  
REV. 153  
REV. 154  
REV. 155  
REV. 156  
REV. 157  
REV. 158  
REV. 159  
REV. 160  
REV. 161  
REV. 162  
REV. 163  
REV. 164  
REV. 165  
REV. 166  
REV. 167  
REV. 168  
REV. 169  
REV. 170  
REV. 171  
REV. 172  
REV. 173  
REV. 174  
REV. 175  
REV. 176  
REV. 177  
REV. 178  
REV. 179  
REV. 180  
REV. 181  
REV. 182  
REV. 183  
REV. 184  
REV. 185  
REV. 186  
REV. 187  
REV. 188  
REV. 189  
REV. 190  
REV. 191  
REV. 192  
REV. 193  
REV. 194  
REV. 195  
REV. 196  
REV. 197  
REV. 198  
REV. 199  
REV. 200