

MCR-SL-HT-PT 100-I


Order No.: 2864516



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2864516>

MCR head-mounted temperature transducers for resistance thermometers, thermocouples, resistance-type sensors and voltage sensors. For Pt 100 resistance thermometers

Commercial data

GTIN (EAN)	 4 017918 893217
sales group	H515
Pack	1 pcs.
Customs tariff	85437090
Catalog page information	Page 419 (IF-2011)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data

Configurable/programmable	Yes, programmable
Sensor types (RTD) that can be used	Pt 100 ; minimum measurement range 10 K
Connection method	2, 3, 4-wire

Output data

Output name	Current output
Current output signal	4 mA ... 20 mA 20 mA ... 4 mA
Output current with wire break	≤ 3.6 mA or ≥ 21 mA (adjustable)

Output current with short-circuit	$\leq 3.6 \text{ mA}$ or $\geq 21 \text{ mA}$ (adjustable)
Output current range with overrange/underrange	$\leq 20.5 \text{ mA}$ / $\geq 3.8 \text{ mA}$ (linear increase/decrease)
Load/output load current output	(Max $(V_{\text{supply}} - 10 \text{ V}) / 0.023 \text{ A}$ (current output))

Power supply

Name	Loop-powered
Supply voltage range	10 V DC ... 35 V DC
Max. current consumption	< 3.5 mA

Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.75 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	15
Stripping length	8 mm
Screw thread	M3

General data

Step response (10-90%)	< 2 s
Pickup delay	4 s
Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP00, IP54 (integrated in the connecting head)
Noise emission	EN 61 326-1 (IEC 1326) and NAMUR EN 21
Noise immunity	EN 61 326-1 (IEC 1326) and NAMUR EN 21
Color	green
Housing material	Polycarbonate, PC
Mounting position	Any
Assembly instructions	Connection head according to DIN 43729 form B
Configuration	Using MCR-PI-CONF-WIN configuration software package
Conformance	CE-compliant
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Certificates / Approvals




Certification	CUL, GOST, UL
Certification Ex:	CUL-EX LIS, UL-EX LIS

Accessories

Item	Designation	Description
Cable/conductor		
2881078	CM-KBL-RS232/USB	Connecting cable D-9-SUB to USB, with adapter D-9-SUB to D-25-SUB.
2864590	MCR-PAC-T	Software adapter cable, 2.4 m for programming MCR-...-LP-...- and MCR-...-HT-... modules
General		
2814799	MCR/PI-CONF-WIN	PI/MCR configuration software, for programming the PI/Ex-RTD..., PI/Ex-THC..., MCR-T-..., MCR-PSP-..., MCR-f... and MCR-s...modules

Diagrams/Drawings

Connection diagram

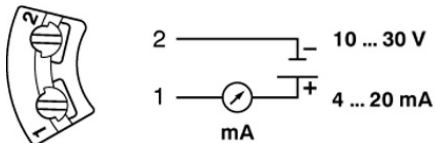

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;