SPECIFICATIONS


"Preliminary"

Model Number: DDE893524Z1E

Part Number: 041000 April 11, 2007



Mechanical Drawing:

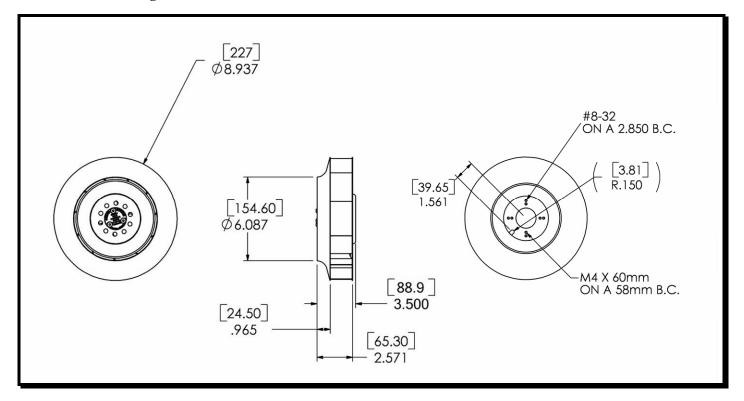

Motor:

Nominal Voltage = 24 VDCOperating Voltage Range = 16 - 32 VDCNominal Running Current = 5.2 ampsLocked Rotor Current = TBD amps **Running Power** = 142 watts Average Speed = 3530 RPMBearings = Ball = 750 CFMAir Flow Static Pressure = 3.4 (in/H₂O)

= TBD

Construction:

Motor Base: Die Cast Aluminum Propeller: Sheet Metal, Galvanized

Agency Approvals:

Pending

Acoustic

Life Expectancy:

TBD

Additional Features:

Brushless DC Motor

Electronic Locked Rotor Protection

Polarity Protected

Automatic Restart Capability

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Tachometer Specifications:

Output: Open Collector

Ic: 20 mA. Max Vcc: 32 VDC Max

Pulses per Revolution: 2 Isolated: No

Termination:

12" Leadwires, 22 AWG, UL 1061

Red - Power (+)

Black - Return (-)

Blue/White - Tachometer (Output)