## **SPECIFICATIONS**


"Preliminary"

Model Number: DDE983548Z1E2





## **Mechanical Drawing:**

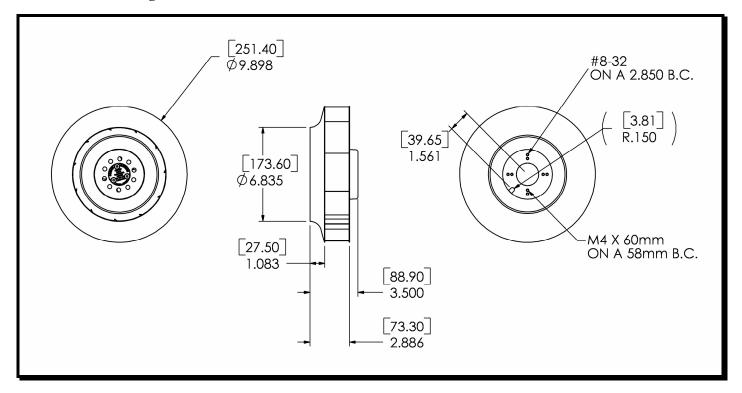

Motor:

Nominal Voltage =48 VDCOperating Voltage Range = 28 - 72 VDCNominal Running Current = 4.5 ampsLocked Rotor Current = TBD amps **Running Power** = 216 watts Average Speed = 3240 RPMBearings = Ball Air Flow = 1005 CFMStatic Pressure = 3.72 (in/H<sub>2</sub>O)

= TBD

**Construction:** 

Acoustic

Motor Base: Die Cast Aluminum Propeller: Sheet Metal, Galvanized

**Agency Approvals:** 

Pending

**Life Expectancy:** 

**TBD** 

**Additional Features:** 

Brushless DC Motor

Electronic Locked Rotor Protection

Polarity Protected

**Automatic Restart Capability** 

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Programmable (PWM)

**Tachometer Specifications:** 

Output: Open Collector

Ic: 20 mA. Max Vcc: 72 VDC Max

Pulses per Revolution: 2 Isolated: No

**Termination:** 

12" Leadwires, 22 AWG, UL 1061

Red - Power (+) Black - Return (-)

Blue/White – Tachometer (Output)

Yellow – Program (Input)