

600NV Series




Tubeaxial

60x60x25mm VARIOFAN




- DC fans with electronically commutated external rotor motor. Fully integrated commutation electronics.
- With electronic protection against reverse polarity, blocking and overloading.
- Mounting from either face using four 3.7 mm holes.
- Temperature sensor (LZ370) must be ordered separately.
- Fan of fiberglass reinforced plastic. PBTP housing, PA impeller.
- Air exhaust over struts. Rotational direction CCW looking at rotor.
- Electrical connection via 2 leads AWG 22, TR 64. Stripped and tinned ends.
- UL, CSA, VDE approvals on some models, please contact application engineering.


Part Number	Curve	CFM @ 0	VDC	Volt. Range	Power (W)	dB(A)	Max. Amb. Temp. C	Bearing Type	Features	Wgt. (lbs)
30°C ▼ 55°C 612NGMI	1	10.6	12	8 to 12.6	1.3	14	65	Sintec	Leads	0.19
	2	20.6			1.7	28				
30°C ▼ 55°C 612NMI	3	11.8	12	8 to 12.6	1.0	16	65	Ball	Leads	0.19
	4	20.6			1.4	28				
30°C ▼ 55°C 612NGNI*	5	13.5	12	8 to 12.6	1.7	18	65	Sintec	Leads	0.19
	6	24.1			2.4	35				
30°C ▼ 55°C 612NNI	5	13.5	12	8 to 12.6	1.2	18	65	Ball	Leads	0.19
	6	24.1			1.5	35				
30°C ▼ 55°C 612NGNV	5	13.5	12	8 to 12.6	1.7	18	65	Sintec	Leads	0.19
	6	24.1			2.4	35				

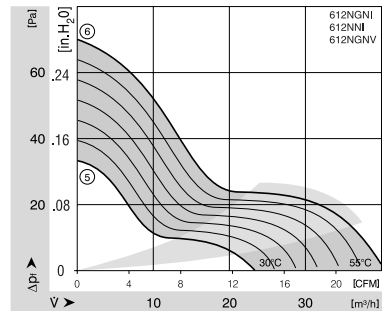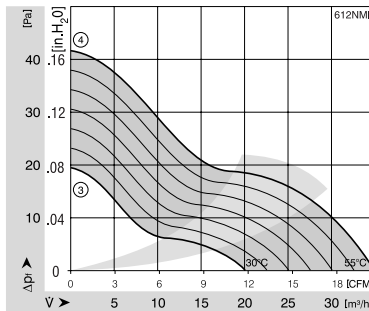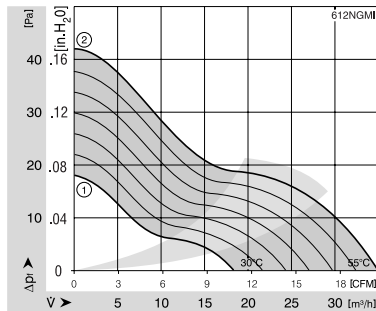

*Optional: Variant with additional 3. lead for external temperature sensor and alarm signal



for controlling the motor speed is positioned directly in the air flow.

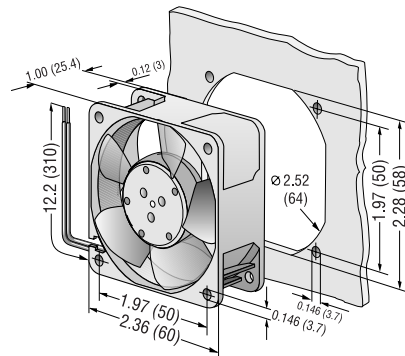

ebmpapst

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2006 © ebm-papst Inc. reserves the right to change any specifications or data without notice