



Bi-Sonic



DC Brushless Fan

433-SP402005H

Date Last Revised: 4-7-05

BI-200012

Dimensions: mm (In.)

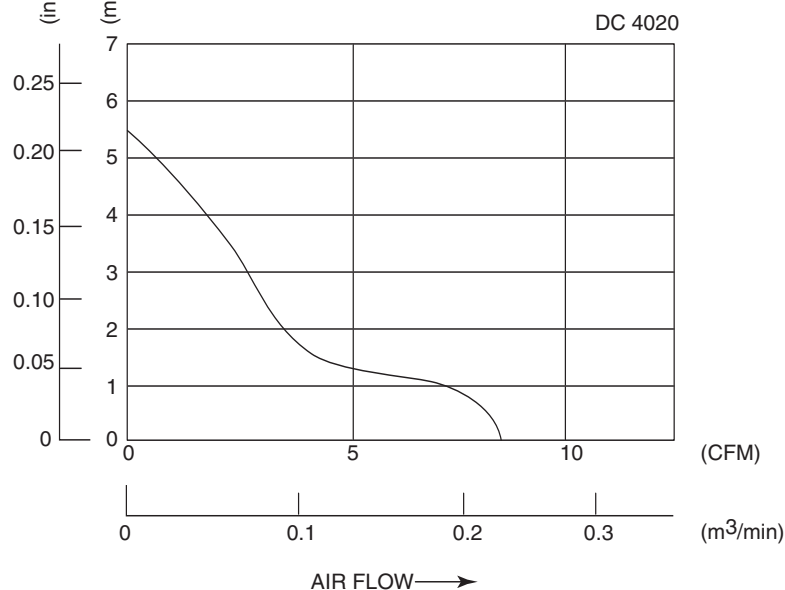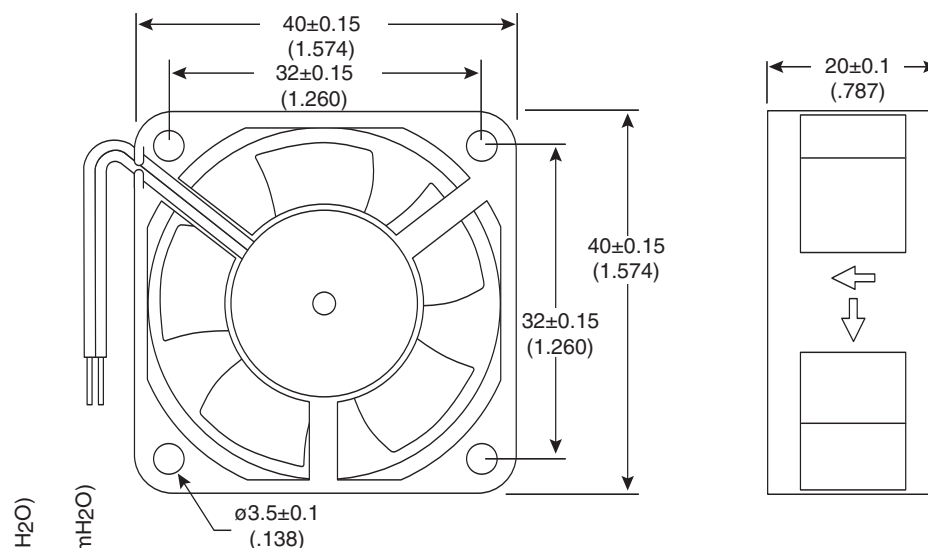

Electrical Specifications:

- Insulation resistance: 10MΩ min. at 500VDC
- Dielectric strength: 5mA max. at 500VAC 60Hz one minute (between frame and terminal)
- Voltage: 5VDC
- Operating voltage range: 4.3V-5.7V
- Rated current: 0.12A
- Rated input power: 0.60w
- Speed: 5000 R.P.M.
- Max. air flow: 5.4 CFM
- Noise: 27 dB A

Mechanical Specifications:

- Operating temperature: -10°C to +70°C
- Function: frequency generator signal option

Materials:

- Housing: Glass fiber reinforced plastic
- Impeller: PBT are UL 94V-0 rating
- Bearing: Sleeve

Available from Mouser Electronics

1-800-346-6873

www.mouser.com

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.