


## ENERGIZER NO. L544



### Industry Standard Dimensions in mm (inches)

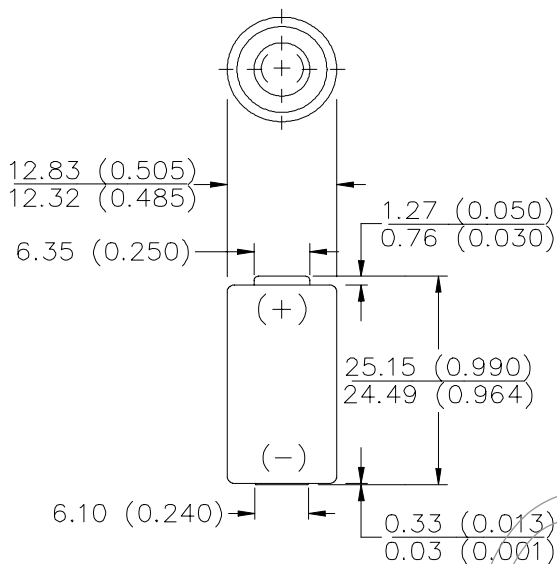


**Chemical System:** Lithium  
 Lithium/Manganese Dioxide (Li/MnO<sub>2</sub>)

**Designation:** IEC - 2CR11108  
**Battery Voltage:** 6.0 Volts  
**Average Weight:** 9.0 grams (0.3 oz.)  
**Volume:** 3.3 cubic centimeters (0.2 cubic inch)  
**Average Capacity:** 160 mAh to 4.0 volts  
 (Rated Capacity at 30k ohms at 21°C)

**Maximum Reverse Charge Current:** 1 microampere  
**Max Discharge:** 60 mA continuous - 80 mA pulse  
**Cells:** 2-1/3N-P

**Typical Discharge Characteristics**  
 Simulated test at 21°C (70°F)

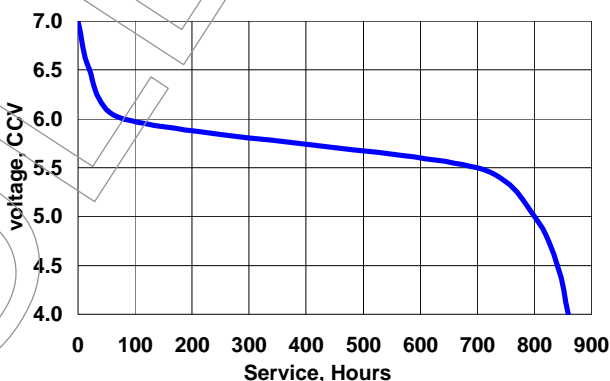

### Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 5.6V (microamperes)	Load (ohms)	Cutoff Voltage
			4.0V
24 hours/day	185	30,000	861 Hours

### INTERNAL RESISTANCE

Closed circuit voltage no less than 4 volts on a load of 50 ohms at 21°C (70°F) for 1.0 second.

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved