
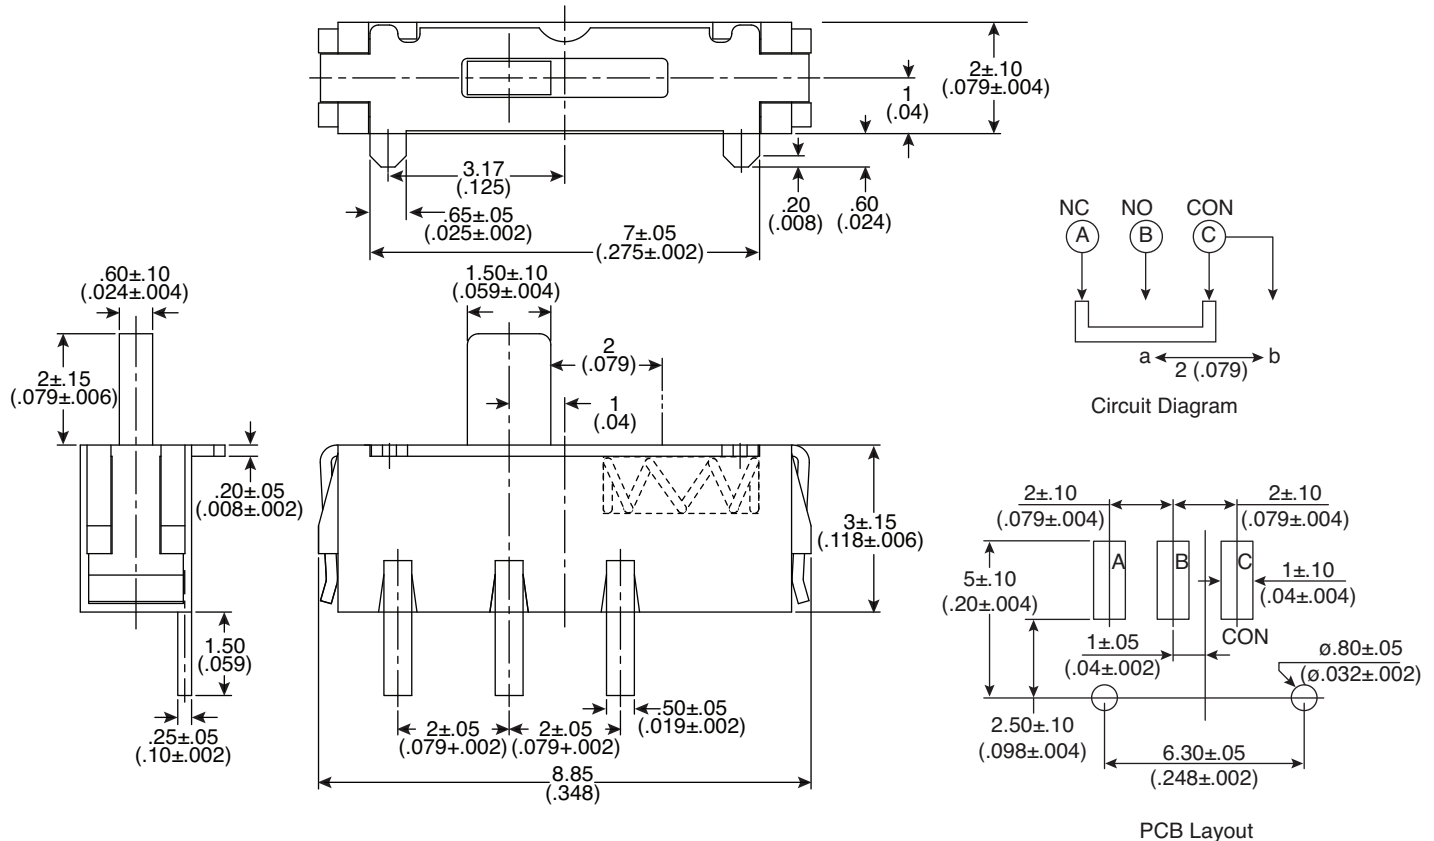


Dimensions: mm (in.)



**Electrical Specifications:**

- Rating: Non-Switching-100mA/50VDC  
Switching-25mA/24VDC
- Contact Resistance: 100mΩ max.
- Insulation Resistance: 100MΩ min.
- Dielectric Strength: 500VAC for 1 min.

**Mechanical Specifications:**

- Operating Temperature: -20°C~+70°C
- Storage Temperature: -40°C~+85°C
- Tolerance:  $\pm 0.20$ mm

**Note:**

- RoHS compliant and process compatible with 260° solder

Slide Switch (SMD)  
103-5032-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.